

# Narrow Applications

Authorized Sales & Service  
**J. HERBERT CORPORATION**  
 Call 1-800-255-0588  
 407-846-0588 Fax: 846-1066  
 info@jherbertcorp.com  
 Visit us online:  
 www.jherbertcorp.com


## Model C - Load Beam with 4 Inline Pads - Standard Duty

For lifting long, narrow sized material. Width should not exceed 5 times the pad diameter (see specifications below for pad diameter).

**QUICKSHIP PROGRAM**

### PRODUCT FEATURES:

- Ball mounted vacuum pads.
- Brass fittings.
- Push lock hose (designed for 250 psi).
- Slide valves allow for manual isolation of vacuum pads.
- Muffler/filter is spin on type for easy change out.

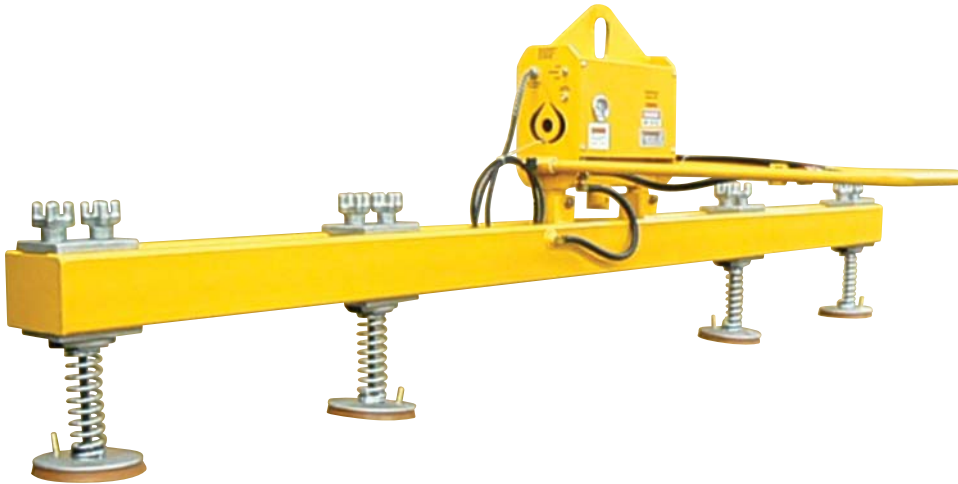

Add FEET to blank Model Number box to complete code.  
 Example: 5' load beam - CE12S8 LENGTH

### SPECIFICATIONS

| Rated Capacity (lbs.)     | Base Wt. @ 5' (lbs.) | Model Number                     | Power-Pac  | Flared Diameter (in.) | Load Beam Length (ft.) |   |   |    |    |    |    |
|---------------------------|----------------------|----------------------------------|------------|-----------------------|------------------------|---|---|----|----|----|----|
|                           |                      |                                  |            |                       | 5                      | 6 | 8 | 10 | 12 | 15 | 20 |
| <b>Electric</b>           |                      |                                  |            |                       |                        |   |   |    |    |    |    |
| 680                       | 203                  | CE6S6 <input type="checkbox"/>   | UNIVAC-250 | 7-1/4                 | 5                      | 6 | 8 | 10 | 12 | 15 | 20 |
| 1240                      | 223                  | CE12S8 <input type="checkbox"/>  | UNIVAC-250 | 9-5/8                 | 5                      | 6 | 8 | 10 | 12 | 15 | 20 |
| 1600                      | 280                  | CE16V8 <input type="checkbox"/>  | UNIVAC-250 | 10-5/8                | 5                      | 6 | 8 | 10 | 12 | 15 | 20 |
| 2400                      | 295                  | CE24V10 <input type="checkbox"/> | UNIVAC-250 | 12-1/4                | 5                      | 6 | 8 | 10 | 12 | 15 | 20 |
| <b>Shop Air - Venturi</b> |                      |                                  |            |                       |                        |   |   |    |    |    |    |
| 680                       | 225                  | CA6S6 <input type="checkbox"/>   | V-40       | 7-1/4                 | 5                      | 6 | 8 | 10 | 12 | 15 | 20 |
| 1240                      | 230                  | CA12S8 <input type="checkbox"/>  | V-40       | 9-5/8                 | 5                      | 6 | 8 | 10 | 12 | 15 | 20 |
| 1600                      | 250                  | CA16V8 <input type="checkbox"/>  | V-40       | 10-5/8                | 5                      | 6 | 8 | 10 | 12 | 15 | 20 |
| 2400                      | 265                  | CA24V10 <input type="checkbox"/> | V-40       | 12-1/4                | 5                      | 6 | 8 | 10 | 12 | 15 | 20 |

Other sizes available, consult factory.