

mansaver®

- Telescoping diametral grabs for all applications
- Designed for safety and ease of use
- Available in any required load capacity



G1394 Diametral Telescoping Grabs

G1394 DIAMETRAL TELESCOPING ROLL GRABS

Mansaver® offers G1394 telescoping grabs in both standard configurations or special designs to meet the requirements of your lifting needs.

While G1394 style grabs are most often used for handling paper rolls, they are also readily adaptable for handling metal coils, pipe, round stock, and bundles of material.

All ACCO lifters conform to ASME B30.20 standards for below-the-hook lifters. Standard paint is ACCO safety yellow machine enamel.

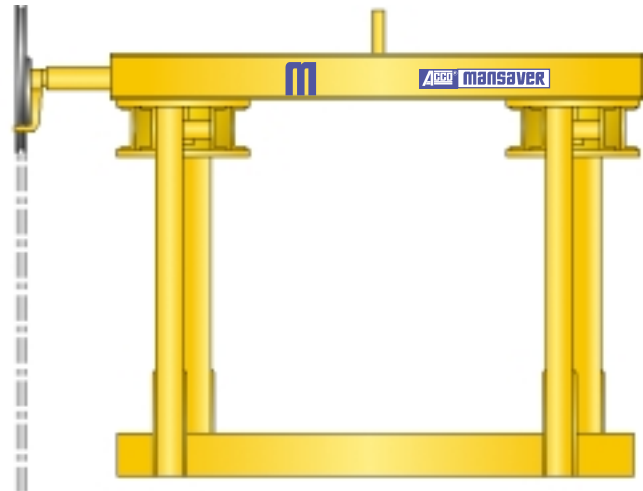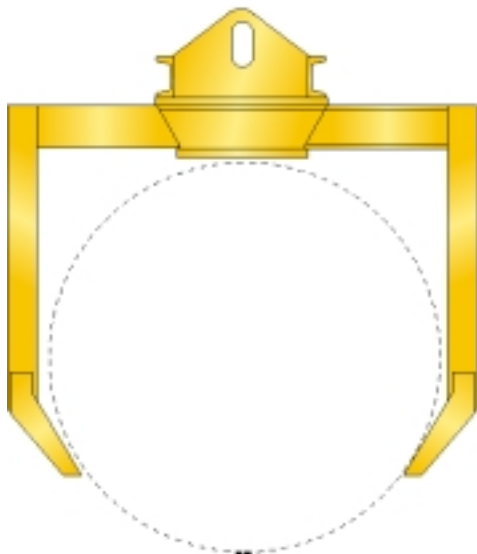



- Chainwheel operated grab
- Single plate type bail

Authorized Sales & Service
J. HERBERT CORPORATION
Call 1-800-255-0588
407-846-0588 Fax: 846-1066
info@jherbertcorp.com


Visit us online:
www.jherbertcorp.com

ACCO® 7.3.1

G1394 Diametral Telescoping Grabs

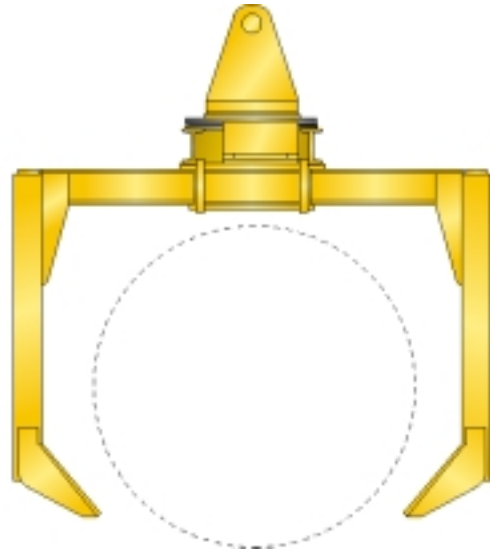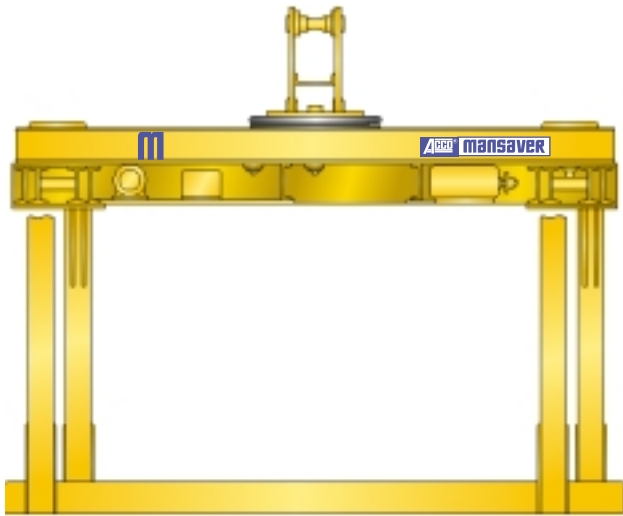

- Motorized rotation and leg operation
- Replaceable pin type bail

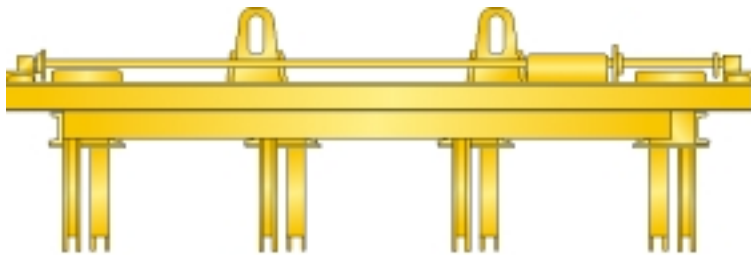


- Motorized grab designed for bar stock, pipe, or bundle handling
- Twin plate bail suspension

Standard Diametral Roll Lifters

Capacity in lbs.	Roll Diameter		Leg		Length C	Height H	Est. Weight lbs.
	Min. A	Max. A	Width D	Depth L			
1,000	10	30	5-1/2	25-1/4	84	11-1/2	750
2,000	12	48	8	42	84	13	1,000
4,000	24	60	17	53-1/2	96	14	1,400
8,000	24	60	17	53-1/2	96	15	2,000
12,000	30	60	19	55	96	16	3,500

All dimensions shown are in inches and are approximate.

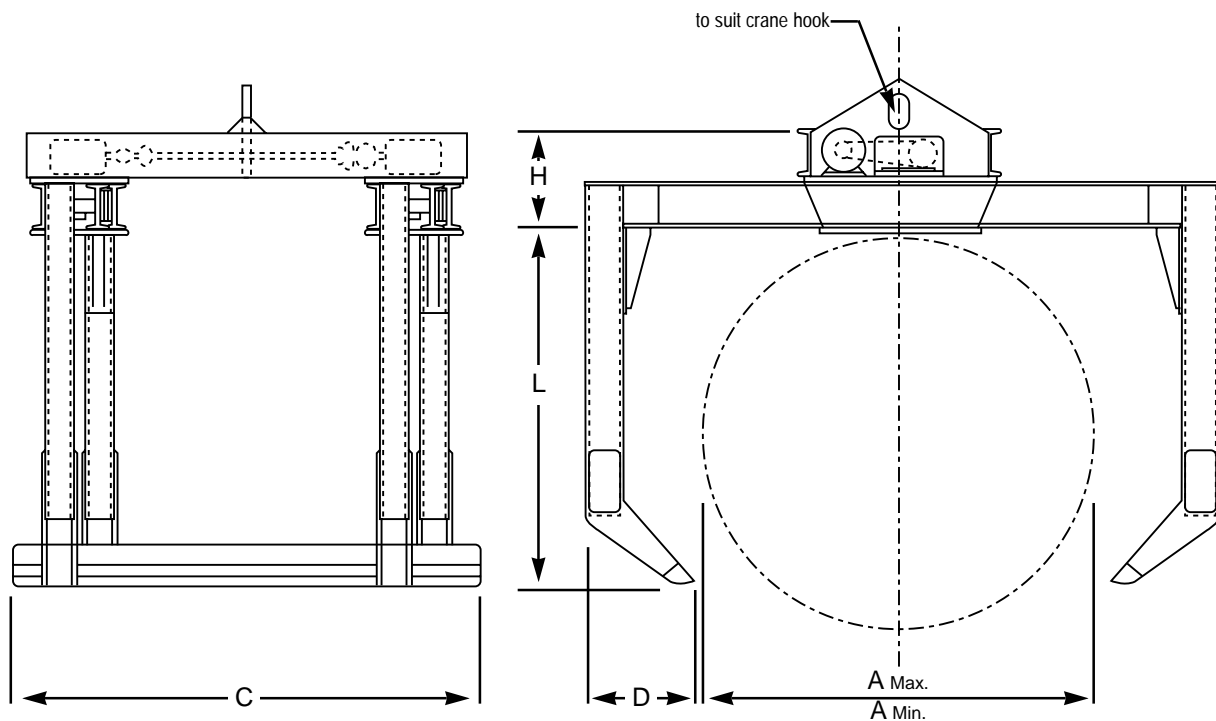

Authorized Sales & Service
J. HERBERT CORPORATION
 Call 1-800-255-0588
 407-846-0588 Fax: 846-1066
 info@jherbertcorp.com

Visit us online:
www.jherbertcorp.com

Authorized Sales & Service

J. HERBERT CORPORATION

Call 1-800-255-0588

407-846-0588 Fax: 846-1066

info@jherbertcorp.com

Visit us online:

www.jherbertcorp.com



G1394 Diametral Telescoping Grabs

Selection Guide

All Mansaver® G1394 roll grabs are designed to perform specific lifting tasks in conjunction with other lifting equipment. The grab examples and standard model descriptions

on the preceding pages are intended to assist in determining what grab is best suited to your lifting task. Please supply available application information below and submit to the

Mansaver® sales department for pricing and further assistance in equipment choice.

All ACCO MANSAYER® Products meet or exceed ANSI B.30.20* for "Below The Hook" lifting devices.

All ACCO MANSAYER® Products have a one year warranty on workmanship and materials.**

* Please refer to ANSI Standards B.30.20 and B.30.9 for all lifting applications and guidelines.

** Consult the factory for further details.

LOAD INFORMATION:

Load description (paper or metal rolls, round stock, pipe, bundles, other): _____

O.D. range of load: _____

Face width or load length range: _____

Maximum load weight: _____

GRAB INFORMATION:

Required grab capacity: _____

Capacity of the hoist the grab will used with: _____

Lifter type (manual, powered, rotating): _____

Lifter suspension (pin or plate, double, sheaves): _____

Options (grip pad rollers, special grip pad facings, special paint, other): _____

Lifting Hoist Hook Information on reverse side


Clear Form

Authorized Sales & Service
J. HERBERT CORPORATION
Call 1-800-255-0588
407-846-0588 Fax: 846-1066
info@jherbertcorp.com
Visit us online:
www.jherbertcorp.com

ACCO® 7.3.5

Lifting Hoist Hook Information

(Please Fill Out Completely)

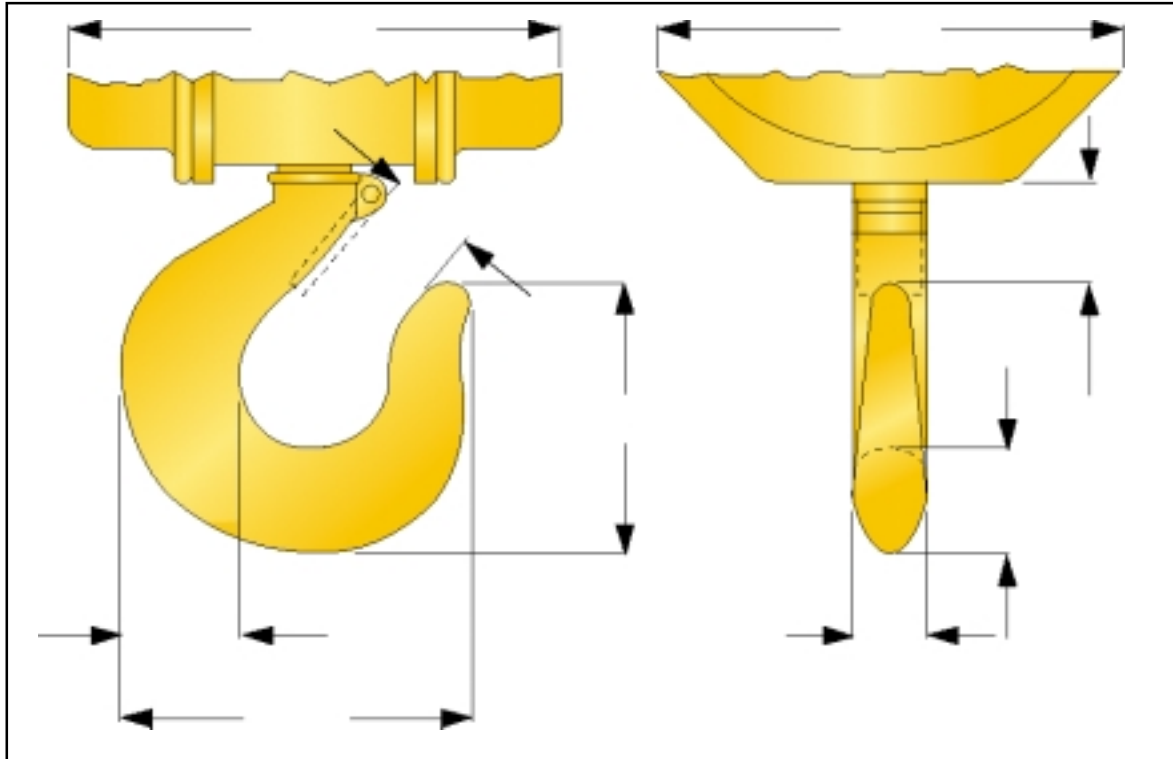

Acco® Acco Chain & Lifting Products Division

76 Acco Drive, Box 792, York, PA 17405
Telephone 800-967-7333 Fax 800-715-8897
www.accolifting.com

PART OF THE **FKI** GROUP OF COMPANIES

Acco® 7.3.6

Authorized Sales & Service
J. HERBERT CORPORATION
Call 1-800-255-0588
407-846-0588 Fax: 846-1066
info@jherbertcorp.com

Visit us online:
www.jherbertcorp.com