


Authorized Sales & Service  
**J. HERBERT CORPORATION**  
 Call 1-800-255-0588  
 407-846-0588 Fax: 846-1066  
 info@jherbertcorp.com  
 Visit us online:  
 www.jherbertcorp.com

## CSC CLOSE STACKING C-HOOK

### PRODUCT FEATURES

- Recessed counterweight allows for close stacking of coils which maximizes floor space.
- Handles a wide range of coil widths.
- Designed for heavy duty application.
- High tensile alloy steel plate reduces physical size and weight.
- Counter balanced to hang level when empty.
- Inside radius on hooks avoid coil edge contact.
- Curved coil saddle is standard.
- Guide handle for ease of hook positioning.
- Available with optional padding for additional coil protection.
- Complies with ASME standards.

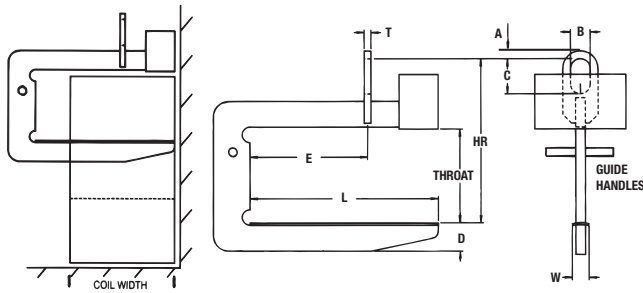

NOTE: E dimension is one-half of maximum coil width.

**WARNING**  
 CENTER OF THE HOIST AND  
 BAIL MUST BE IN-LINE WITH  
 THE LOAD'S CENTER OF GRAVITY.

COIL LIFTERS  
& UPENDERS

### SPECIFICATIONS

Model Number	Capacity (tons)	Dimensions (inches)											Weight (lbs.)
		Coil Width		Throat	Lifting Arm			HR Headroom	Bail Dimensions			Thk. T	
		Max.	Min.		Length L	Depth D	Width W		Opening				
A	B	C											
<b>CSC536</b>	5	36	24	24	30	5-5/16	4	37-1/4	1-1/2	4	7	1-1/4	550
<b>CSC548</b>		48	30	24	39	6-1/8	4	38-1/16	1-1/2	4	7	1-1/4	707
<b>CSC560</b>		60	36	24	48	6-15/16	4	38-15/16	1-1/2	4	7	1-1/4	853
<b>CSC7536</b>	7-1/2	36	24	24	30	5-5/8	4	37-1/2	1-1/2	4	7	1-1/2	750
<b>CSC7548</b>		48	30	24	39	6-3/8	4	38-1/4	1-1/2	4	7	1-1/2	996
<b>CSC7560</b>		60	36	24	48	6-15/16	4	39	1-1/2	4	7	1-1/2	1161
<b>CSC1048</b>	10	48	30	24	39	7-3/16	4	41-1/4	2	5	9	1-3/4	1200
<b>CSC1060</b>		60	36	24	48	7-5/8	4	41-1/2	2	5	9	1-3/4	1645
<b>CSC1072</b>		72	42	24	57	7-1/4	4	41-1/8	2	5	9	1-3/4	2100
<b>CSC1548</b>	15	48	30	30	39	7-1/4	4	47-7/8	2	5	9	1-3/4	2054
<b>CSC1560</b>		60	36	30	48	8	4	48	2-1/4	5	9	1-3/4	2410
<b>CSC1572</b>		72	42	30	57	8-3/4	4	48-3/4	2	5	9	1-3/4	2814
<b>CSC2060</b>	20	60	36	30	48	9-1/8	4	52-1/8	2-1/4	6	12	2	2864
<b>CSC2072</b>		72	42	30	57	9-3/4	4	52-1/2	2-1/4	6	12	2	2951
<b>CSC2560*</b>	25	60	36	34	48	9	4	57-3/4	2-1/2	6	14	2-1/4	3077
<b>CSC2572*</b>		72	42	34	57	9-3/4	4	58-3/4	2-1/2	6	14	2-1/4	3570
<b>CSC3060*</b>	30	60	36	34	48	9-7/8	4	58-3/4	2-3/4	6	14	2-1/2	3480
<b>CSC3072*</b>		72	42	34	57	10-5/8	4	59-3/8	2-3/4	6	14	2-1/2	4260
<b>CSC4072*</b>	40	72	42	38	57	11	5	68	3-1/4	7	18	3	6100

\*Counterweight extends beyond arm one-half of the counterweight width, in capacities 25 ton and greater. Other sizes available, consult factory.