


Hevi-Bar II Overview

Authorized Sales & Service
J. HERBERT CORPORATION
Call 1-800-255-0588
407-846-0588 Fax: 846-1066
info@jherbertcorp.com
Visit us online:
www.jherbertcorp.com

The rugged Hevi-Bar II Conductor Bar System delivers reliable, high-capacity electrical performance. It is ideal for tough environments and demanding, heavy-use applications found in mills, heavy industry, storage yards, and transit systems. It is truly a “put it up once and forget it” system that will last for the life of your equipment.

UL Listed

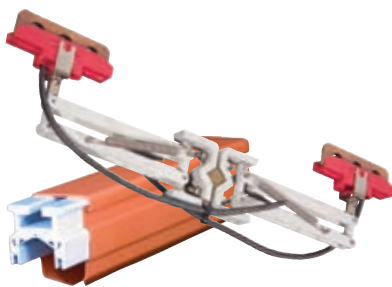

Hevi-Bar II is ideal for:

- Medium to large cranes
- Bulk Handling Systems
- Mills and heavy industry
- Transit Systems
- Material Handling Equipment
- Other mobile power applications

Ampacity Selections: 500A, 700A, 1000A, and 1500A, at 600 volts.

Maximum Speed: 2000 feet per minute
(Contact the factory if higher speeds are needed)

Hevi-Bar II Features

- Uses surface area rather than mass to dissipate heat generated by high current conditions
- Can be mounted horizontally or vertically (“side entry”)
- V-grooved for positive and accurate collector shoe tracking
- Has hardened, long-wearing and corrosion resistant stainless steel contact surface.
- Offers a choice of insulating covers:
 - Standard orange for indoor use
 - Green for the ground (bonding) conductor
 - Black UV-resistant for outdoor use
 - Medium or high heat versions to withstand higher ambient temperatures

Hevi Bar II is easy to install and maintain. For further information, please download the Hevi Bar II manual from our web site.

DURA-COAT Option - for Hevi-Bar II

Hevi-Bar II is available with our optional **DURA-COAT** finish, specially formulated for corrosive environments. Hevi-Bar II Dura-Coat uses a combined ceramic compound with epoxy binder to provide superior corrosion resistance. Our systems have been tested in 10% hydrochloric acid and 10% sulfuric acid vapor conditions for corrosion resistance. Concentrations that exceed these levels may cause accelerated wear. The entire bar is coated, with the exception of the stainless steel running surface. The insulating cover is applied over the coating.


DURA-COAT is ideal for galvanizing and electro-plating lines, chemical plants, smelters, foundries and cast houses, coke and ore handling cranes, and oxidizing/electro-winning facilities.

Contact Conductix-Wampfler for further information about **DURA-COAT**.

For a list of job references, contact **Conductix-Wampfler**


Hevi-Bar II Typical 4-Bar System

EXAMPLE OF 4 CONDUCTOR RUNWAY HEAVY BAR 2 (3 PHASE + 1 GROUND)

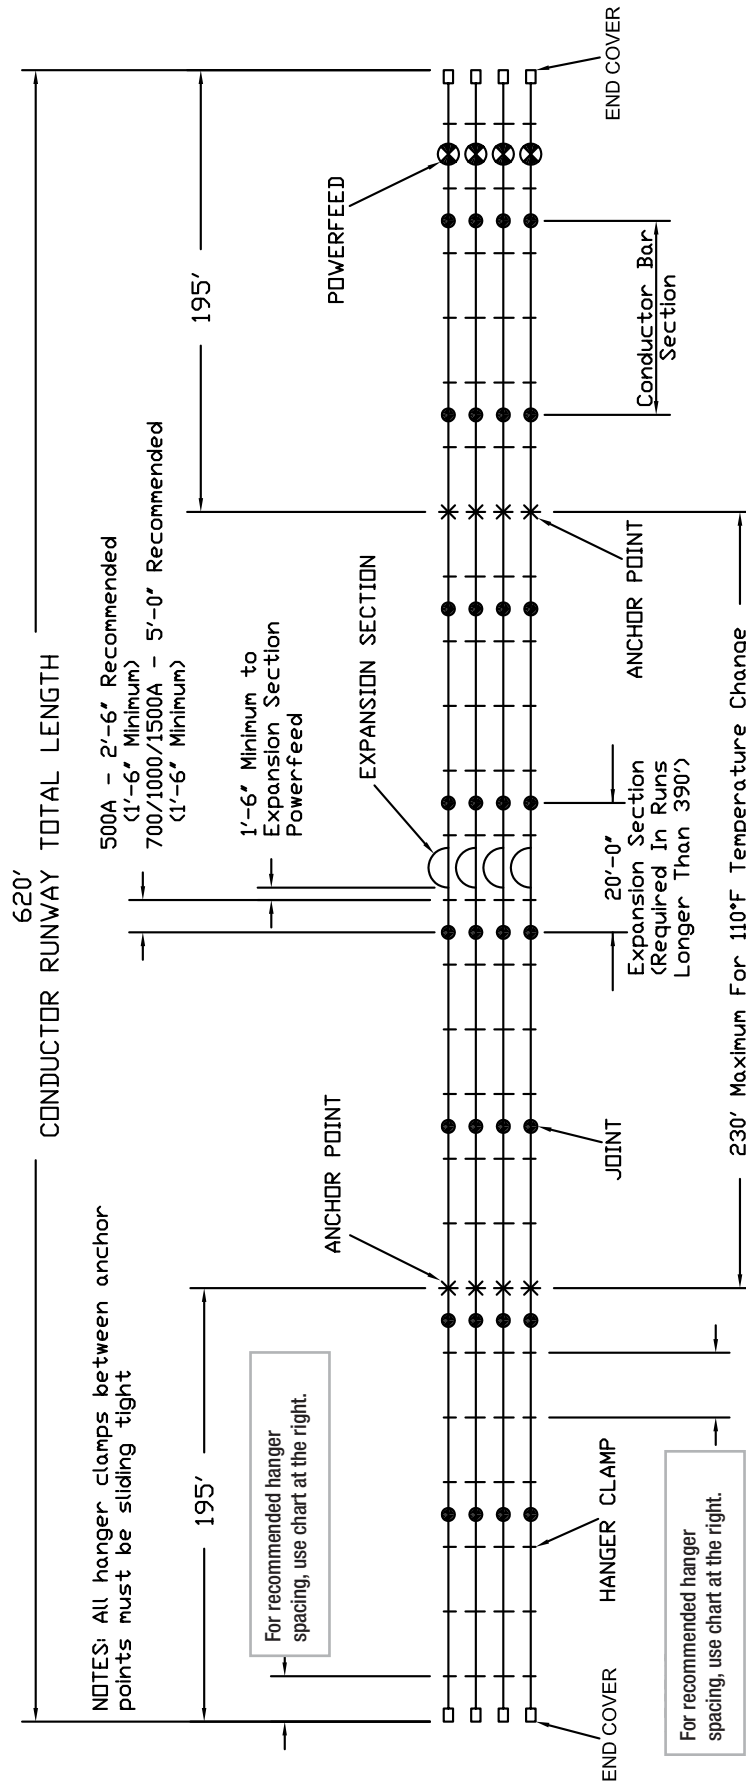

HANGER SPACING CHART

SYSTEM	FIRST HANGER	MAX. HANGER SPACING
500 AMP	2'-6"	5'-0"
700 AMP	3'-9"	7'-6"
1000 AMP	5'-0"	10'-0"
1500 AMP	5'-0"	10'-0"

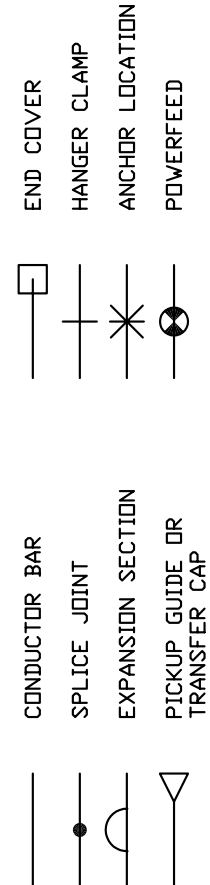


Hevi-Bar II - 500A Conductors


Standard Conductor Bar and Components

Type / Max Temp.	Use (Color)	Conductor Bar	Conductor Bar Cut Lgth (Specify 5 to 29 ft)	Expansion Section	Splice	Power Feed	Power Interrupting Section ♦	End Cover
PVC 160° F	Phase / Indoors (Orange)	27582	27583	37677	37676	37674	50746	27588
	Ground / Indoors (Green)	50258	50260	37677E	37676	37674	N/A	27588
	Phase & Ground / Outdoors UV Stable (Black)	38925	38926	38946	37676	37674	50746B	27588
Poly - carbonate 250°F	Phase & Ground / Indoors & Outdoors (Red)	32496	39225	32498	32499	32500	50747	27588
Wt lb (kg)		26.0 (11.79)	.87 lb/ft. (1.29 kg/m)	30.0 (13.61)	1.2 (0.681)	0.9 (0.408)	50 (22.67)	0.1 (0.045)
Length ft (m)		30.0 (9.114)	*	30.0 (9.114)	/	/	30.0 (9.114)	/


♦ See Appendix IV Pgs. 63-64.

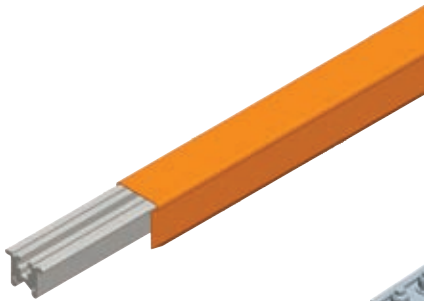

Conductor Bar

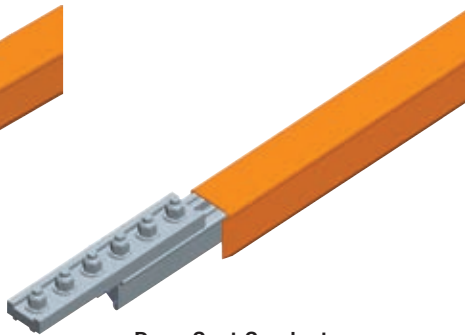


Dura-Coat Conductor Bar with Splice

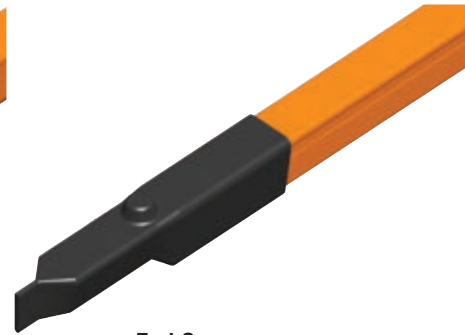


End Cover

Expansion Sections and Power Feed

Expansion Sections are required at all structural expansion joints and for all systems greater than 390 ft (118.87 m). See table above for expansion and power feed part numbers.

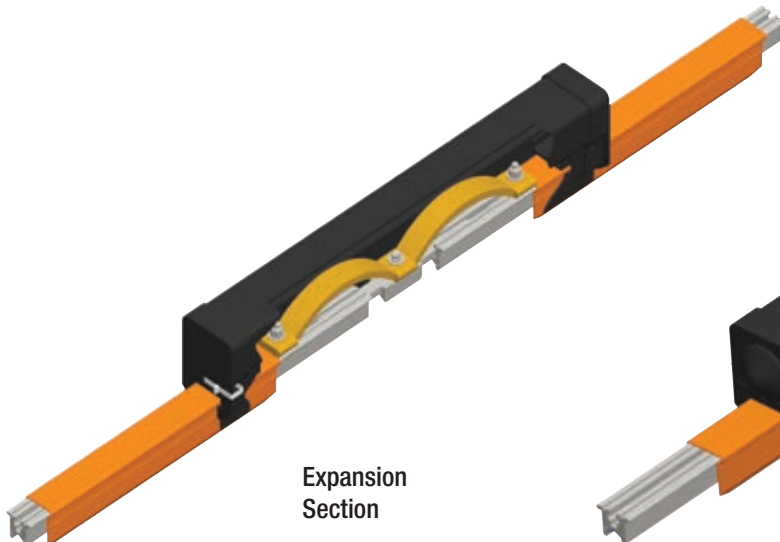

Expansion Section

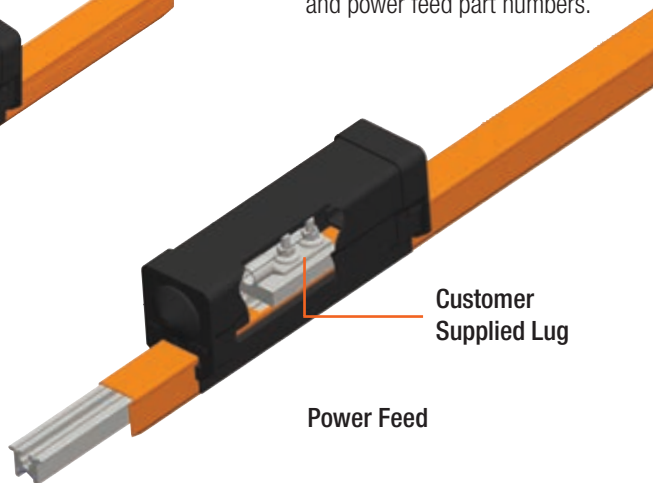

Power Feed

Customer Supplied Lug

Hevi-Bar II - 500A DURA-COAT & Hangers

DURA-COAT Conductor Bar & Components

The ideal option for highly corrosive environments. Splices are pre-installed on Dura-Coat conductors.

Type / Max Temp.	Use (Color)	Conductor Bar	Conductor Bar Cut Lgth (Specify 5 to 29 ft)	Expansion Section	Splice Cover	Power Feed	Power Interrupting Section ♦	End Cover
PVC 160° F	Phase / Indoors (Orange)	39745-J	39747-J	39741-J	51304	37674	50749-J	27588
	Ground / Indoors (Green)	39745G-J	51861-J	39741G-J	51304	37674	N/A	27588
	Phase & Ground / Outdoors UV Stable (Black)	39745B-J	51367-J	39741B-J	51304	37674	50749B-J	27588
Poly-carbonate 250°F	Phase & Ground / Indoors & Outdoors (Red)	50731-J	51383-J	50741-J	51305	32500	50750-J	27588
Wt lb (kg)		27.0 (12.24)	0.90 lb/ft (1.34 kg/m)	28 (12.7)	0.73 (0.33)	4.0 (1.81)	50 (22.67)	1.0 (0.45)
Length ft (m)		30.0 (9.144)	-	30.0 (9.14)	/	/	30.0 (9.14)	/

♦ See Appendix IV Pgs. 63-64.

Hangers

Hangers can be installed on brackets up to 3/8" thick (9.5mm).



Polycarbonate Snap-In



Polycarbonate Snap-in w/Insulator

Hangers - Used with 500A Bar Only	Plated Hardware	Stainless Steel Hardware	Wt lb (kg)
Polycarbonate Snap-In	26591	28368	0.29 (0.14)
Polycarbonate Snap-in w/Insulator	27483	27780	0.89 (0.40)
Stainless Steel Cross Bolt	27481	27788	0.60 (0.27)
Stainless Steel Cross Bolt w/Insulator	27482	29574	1.14 (0.50)

Anchor Pin


Anchor Pin	Part No.	Wt lb (kg)
Anchor Pin (2 Req'd Per Hanger to turn a hanger into an anchor)	23946	.1 (0.05)



Stainless Steel Cross Bolt



Stainless Steel Cross Bolt w/Insulator

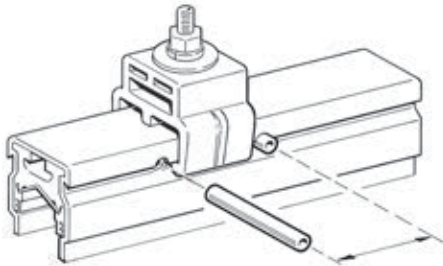

Anchor Pin 23946 (Two Shown)

Hevi-Bar II - 700A Conductors

Authorized Sales & Service
J. HERBERT CORPORATION
 Call 1-800-255-0888
 407-846-0888 Fax: 846-1066
 info@jherbertcorp.com
 Visit us online:
 www.jherbertcorp.com


Standard Conductor Bar and Components

Type / Max Temp.	Use (Color)	Conductor Bar	Conductor Bar Cut Lgth (Specify 5 to 29 ft)	Expansion Section	Splice	Power Feed	Power Interrupting Section ♦	End Cover
PVC 160°F	Phase / Indoors (Orange)	24528	24529	24566	38115	38117	50748	50859
	Ground / Indoors (Green)	24528B	51369	24566B	38115	38117	N/A	50859
	Phase & Ground / Outdoors UV Stable (Black)	38934	38936	38949	38115	38117	50748B	50859
Poly Carbonate 250°F	Phase & Ground / Indoors & Outdoors (Red)	50733	51371	50738	38115C	50067	50752	50859
Fiberglass Reinforced Polyester 400°F	Phase & Ground / Indoors (Orange)	24554	24555	24567D	24558	24594	50754	24585
Wt lb (kg)		34.0 (15.42)	1.13 lb/ft (1.69 kg/m)	24.0 (10.86)	1.9 (0.86)	1.4 (0.64)	66.0 (29.93)	1.8 (0.82)
Length ft (m)		30.0 (9.114)	*	15.0 (4.572)	/	/	30.0 (9.114)	/


♦ See Appendix IV Pgs. 63-64.



Conductor Bar

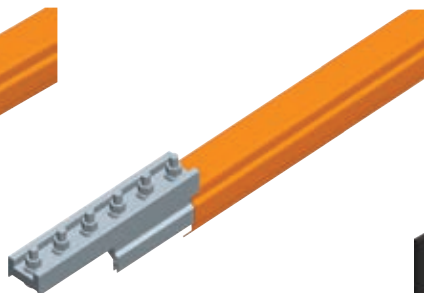


Dura-Coat Conductor Bar with Splice

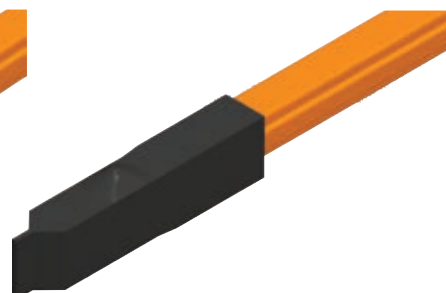


End Cover

Expansion Sections and Power Feed

Expansion Sections are required at all structural expansion joints and for all systems greater than 390 ft (118.87 m). See table above for expansion and power feed part numbers.

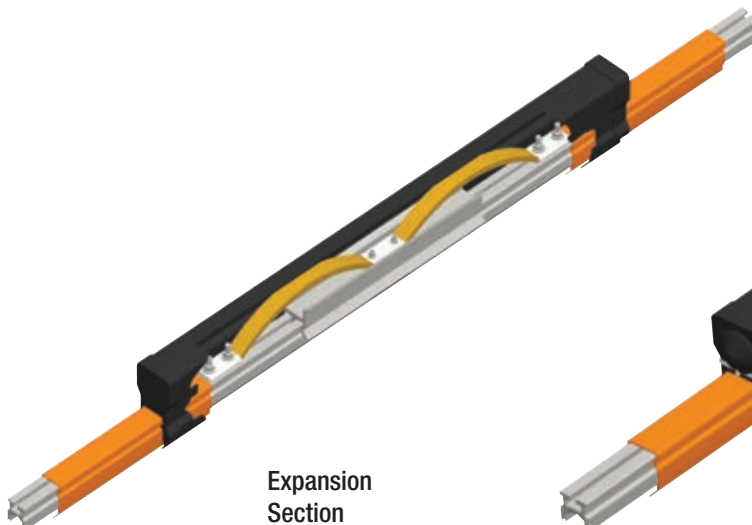

Expansion Section

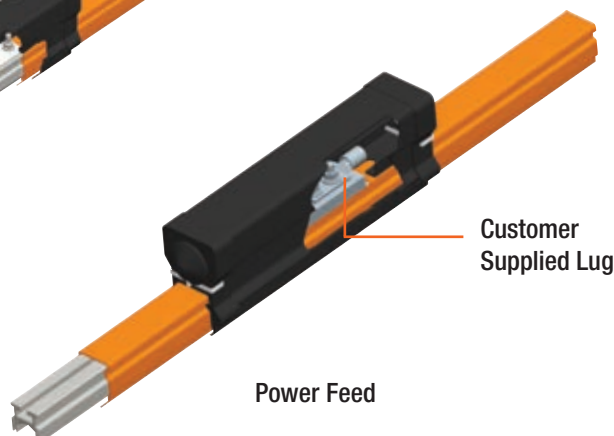

Power Feed

Hevi-Bar II - 700A DURA-COAT & Hangers

DURA-COAT Conductor Bar & Components


The ideal option for highly corrosive environments Splices are pre-installed on Dura-Coat conductors.

Type / Max Temp.	Use (Color)	Conductor Bar	Conductor Bar Cut Lgth (Specify 5 to 29 ft)	Expansion Section	Splice Cover	Power Feed	Power Interrupting Section ♦	End Cover
PVC 160° F	Phase / Indoors (Orange)	39847-J	51372-J	50739-J	51320	38117	50751-J	50859
	Ground / Indoors (Green)	39847G-J	51862-J	50739B-J	51320	38117	N/A	50859
	Phase & Ground / Outdoors UV Stable (Black)	39847B-J	51376-J	50740-J	51320	38117	50751B-J	50859
Poly - carbonate 250°F	Phase & Ground / Indoors & Outdoors (Red)	50062-J	51374-J	50063-J	51321	50067	50753-J	50859
Wt lb (kg)		35.0 (15.87)	1.17 lb/ft (1.74 kg/m)	25.0 (11.33)	0.7 (0.31)	5.0 (2.268)	66.0 (29.93)	2.0 (0.907)
Length ft (m)		30.0 (9.114)	-	15.0 (4.57)	1.5 (0.457)	1.5 (0.457)	30.0 (9.114)	1.5 (0.457)

♦ See Appendix IV Pgs. 63-64.

Hangers

Hangers can be installed on brackets up to 3/8" thick (9.5mm).

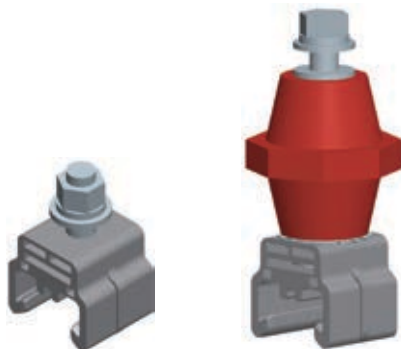


Polycarbonate Snap-In

Polycarbonate Snap-In w/Insulator

Hangers - Used with 700 to 1500A Bar	Plated Hardware	Stainless Steel Hardware	High Temp.	Wt lb (kg)
Polycarbonate Snap-In	23223	28220	N/A	0.27 (0.13)
Polycarbonate Snap-in w/insulator	24902	24902B	N/A	0.83 (0.40)
Stainless Steel Cross Bolt	27481	27788	51972	0.58 (0.28)
Stainless Steel Cross Bolt w/insulator	27482	32807	34361B	1.11 (0.53)


Anchor Pin

Anchor Pin	Part No.	Wt lb (kg)
Anchor Pin (2 Req'd Per Hanger to turn a hanger into an anchor)	23946	.1 (0.05)

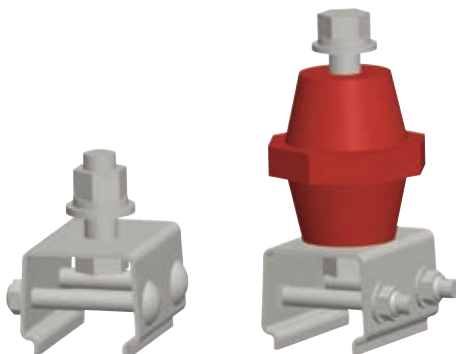

Stainless Steel Cross Bolt

Stainless Steel Cross Bolt w/Insulator

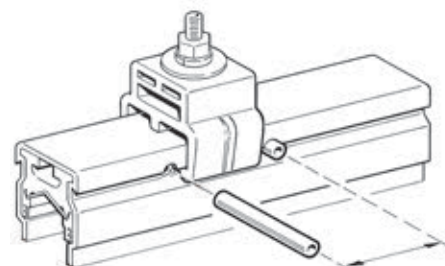

Anchor Pin 23946 (Two Shown)

Hevi-Bar II - 1000A Conductors


Standard Conductor Bar and Components

Type / Max Temp.	Use (Color)	Conductor Bar	Conductor Bar Cut Lgth (Specify 5 to 29 ft)	Expansion Section	Splice	Power Feed	Power Interrupting Section ♦	End Cover
PVC 160° F	Phase / Indoors (Orange)	23500	23503	23512	37746	38184	50755	33796B
	Phase & Ground / Outdoors UV Stable (Black)	23500D	38938	23512C	37746	38184	50755B	33796B
Poly - carbonate 250°F	Phase & Ground / Indoors & Outdoors (Red)	31991	51408	50941	31964	38184D	50756	33796B
Fiberglass Reinforced Polyester 400°F	Phase & Ground / Indoors (Orange)	23508	23511	23514	23520	23530	50757	23523
Wt (lb)		48 (21.77)	1.6 lb/ft (2.39 kg/m)	60 (27.21)	3.0 (1.36)	1.5 (0.68)	79 (35.83)	1.3 (0.59)
Length (ft.)		30	-	20.0	/	/	30.0	/


♦ See Appendix IV Pg. 63-64.



Conductor Bar

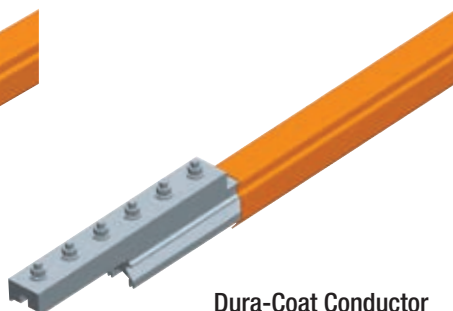


Dura-Coat Conductor Bar with Splice

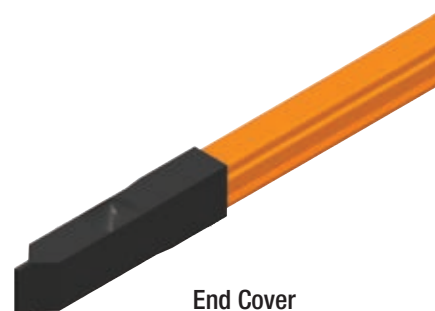


End Cover

Expansion Sections and Power Feed

Expansion Sections are required at all structural expansion joints and for all systems greater than 390 ft (118.87 m). See table above for expansion and power feed part numbers.

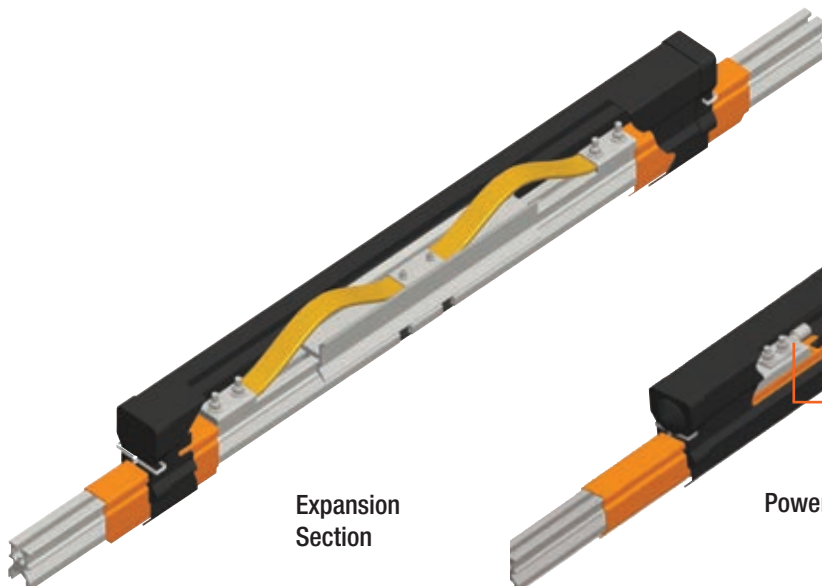

Expansion Section

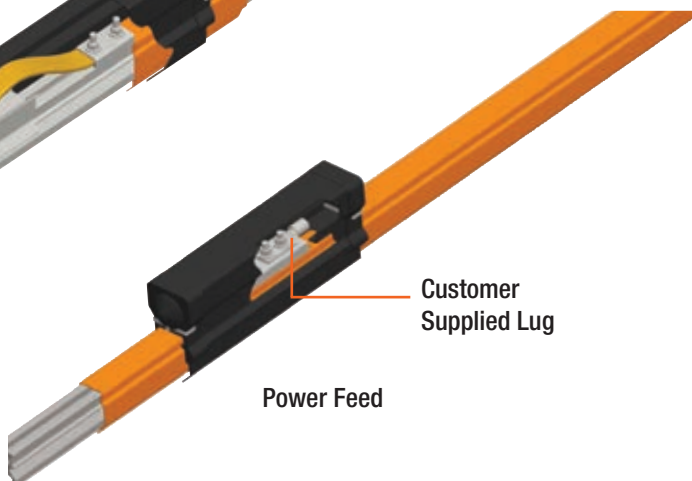

Power Feed

Customer Supplied Lug

Hevi-Bar II - 1000A DURA-COAT & Hangers

DURA-COAT Conductor Bar & Components


The ideal option for highly corrosive environments Splices are pre-installed on Dura-Coat conductors.

Type / Max Temp.	Use (Color)	Conductor Bar	Conductor Bar Cut Lgth (Specify 5 to 29 ft)	Expansion Section	Splice Cover	Power Feed	Power Interrupting Section ♦	End Cover
PVC 160° F	Phase / Indoors (Orange)	50736-J	51377-J	50743-J	51322	38184	50758-J	33796B
	Phase & Ground / Outdoors UV Stable (Black)	50736B-J	51381-J	50743B-J	51322	38184	50758B-J	33796B
Poly - carbonate 250°F	Phase & Ground / Indoors & Outdoors (Red)	50735-J	51379-J	50817-J	534845	38184D	50759-J	33796B
Wt lb (kg)		49 (22.22)	1.63 lb/ft (2.44 kg/m)	40 (18.14)	1.2 (0.54)	6.5 (2.95)	77 (34.92)	1.5 (0.68)
Length ft (kg)		30 (9.114)	*	20 (6.096)	/	/	30 (9.114)	/

♦ See Appendix IV Pgs. 63-64.

Hangers

Hangers can be installed on brackets up to 1/2" thick (12.7mm).

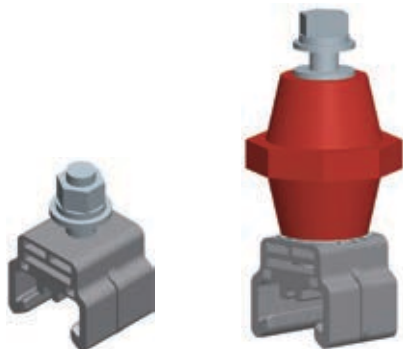


Polycarbonate Snap-In

Polycarbonate Snap-In w/Insulator

Hangers - Used with 700 to 1500A Bar	Plated Hardware	Stainless Steel Hardware	High Temp.	Wt lb (kg)
Polycarbonate Snap-In	23223	28220	N/A	0.28 (0.13)
Polycarbonate Snap-in w/insulator	24902	24902B	N/A	0.87 (0.40)
Stainless Steel Cross Bolt	27481	27788	51972	0.61 (0.28)
Stainless Steel Cross Bolt w/insulator	27482	32807	34361B	1.16 (0.53)


Anchor Pin

Anchor Pin	Part No.	Wt lb (kg)
Anchor Pin (2 Req'd Per Hanger to turn a hanger into an anchor)	23946	.1 (0.05)

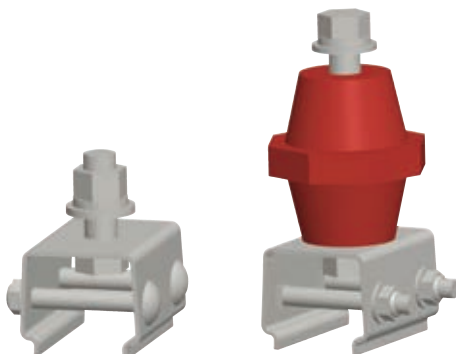

Stainless Steel Cross Bolt

Stainless Steel Cross Bolt w/Insulator

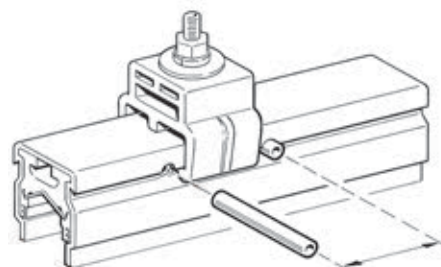

Anchor Pin 23946 (Two Shown)


Hevi-Bar II - 1500A Conductors

Authorized Sales & Service
J. HERBERT CORPORATION
 Call 1-800-255-0588
 407-846-0588 Fax: 846-1066
 info@jherbertcorp.com
 Visit us online:
 www.jherbertcorp.com

Standard Conductor Bar and Components


Type / Max Temp.	Use (Color)	Conductor Bar	Conductor Bar Cut Lgth (Specify 5 to 29 ft)	Expansion Section	Splice	Power Feed	Power Interrupting Section ♦	End Cover
PVC 160° F	Phase / Indoors (Orange)	24000	24003	32820	38968	50227	50760	33796B
	Phase & Ground / Outdoors UV Stable (Black)	24000C	38944	38952	38968	50227	50760B	33796B
Poly - carbonate 250°F	Phase & Ground / Indoors & Outdoors (Red)	39296	39296	39287	34802	50227C	50761	33796B
Wt lb (kg)		96 (43.54)	3.2 lb/ft (4.78 kg/m)	71 (32.2)	3.8 (1.72)	2.1 (0.95)	123.0 (55.8)	1.5 (0.680)
Length ft (m)		30 (9.114)	-	20 (6.10)	/	/	30 (9.114)	/

♦ See Appendix IV Pgs. 63-64.

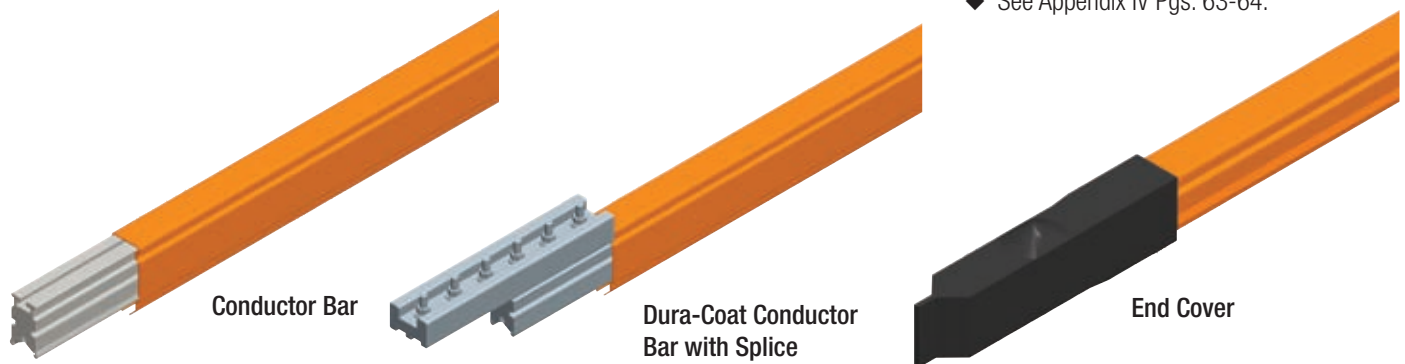

Expansion Sections and Power Feed

Expansion Sections are required at all structural expansion joints and for all systems greater than 390 ft (118.87 m). See table above for expansion and power feed part numbers.

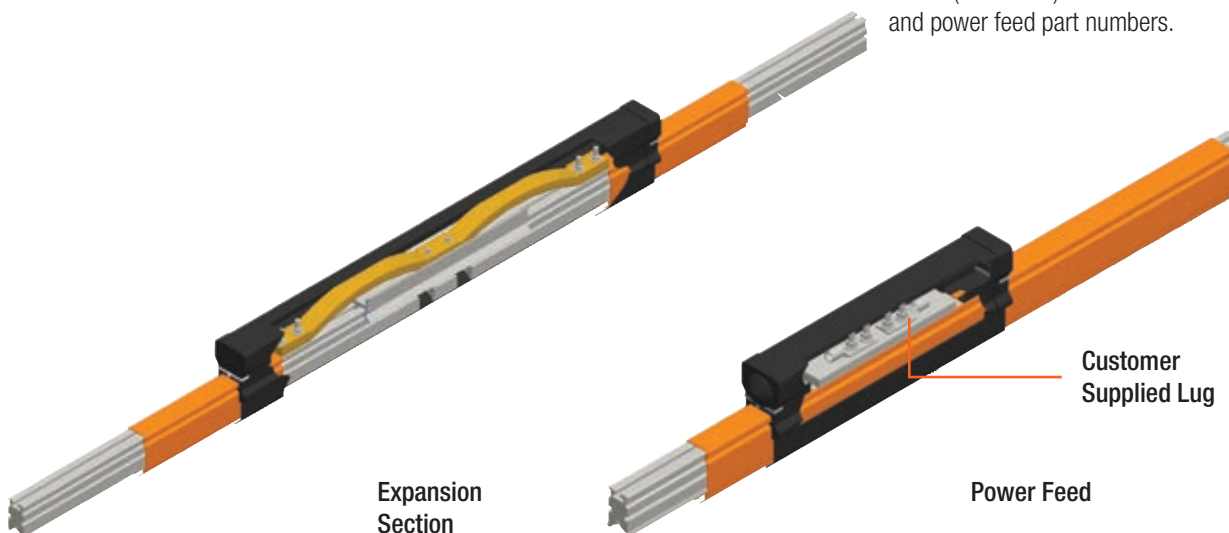

Hevi-Bar II - 1500A DURA-COAT & Hangers

DURA-COAT Conductor Bar & Components


The ideal option for highly corrosive environments Splices are pre-installed on Dura-Coat conductors.

Type / Max Temp.	Use (Color)	Conductor Bar	Conductor Bar Cut Lgth (Specify 5 to 29 ft)	Expansion Section	Splice Cover	Power Feed	Power Interrupting Section ♦	End Cover
PVC 160° F	Phase / Indoors (Orange)	50734-J	51382-J	50742-J	51297	50227	50762-J	33796B
	Phase & Ground / Outdoors UV Stable (Black)	50734B-J	50230-J	50742B-J	51297	50227	50762B-J	33796B
Poly - carbonate 250°F	Phase & Ground / Indoors & Outdoors (Red)	39430-J	39430-J	50060-J	51297B	50227C	50763-J	33796B
Wt lb (m)		97 (44)	3.23 lb/ft (4.83 kg/m)	72 (36.65)	1.41 (0.64)	130 (58.97)	126 (57.15)	1.5 (0.68)
Length ft (m)		30.0 (9.144)	-	20.0 (6.10)	/	/	30.0 (9.144)	/

♦ See Appendix IV Pgs. 63-64.

Hangers

Hangers can be installed on brackets up to 1/2" thick (12.7mm).

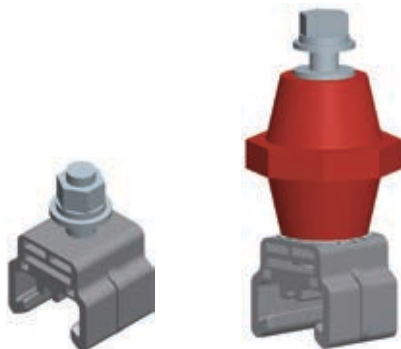


Polycarbonate Snap-In

Polycarbonate Snap-In w/Insulator

Hangers - Used with 700 to 1500A Bar	Plated Hardware	Stainless Steel Hardware	High Temp.	Wt lb (kg)
Polycarbonate Snap-In	23223	28220	N/A	0.28 (0.127)
Polycarbonate Snap-in w/insulator	24902	24902B	N/A	0.87 (0.395)
Stainless Steel Cross Bolt	27481	27788	51972	0.61 (0.277)
Stainless Steel Cross Bolt w/insulator	27482	32807	34361B	1.16 (0.526)


Anchor Pin

Anchor Pin	Part No.	Wt lb (kg)
Anchor Pin (2 Req'd Per Hanger to turn a hanger into an anchor)	23946	.1 (0.05)

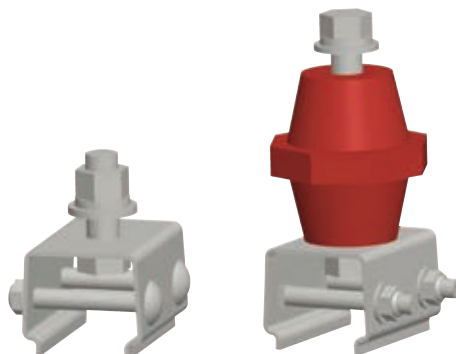

Stainless Steel Cross Bolt

Stainless Steel Cross Bolt w/Insulator

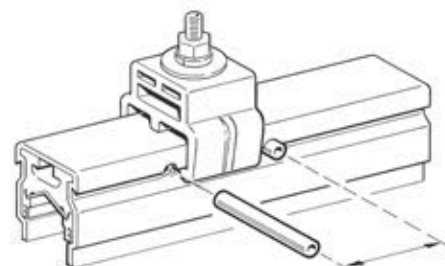


Anchor Pin 23946 (Two Shown)

Hevi-Bar II Collectors & Replacement Shoes

All collectors include long-wearing copper graphite shoes in holders and "pigtail" wiring as noted below. For recommendations about choosing collectors, see Appendix I Pgs. 57-60.

Single Collector - 125 Amp




30388 - Pigtails not shown

21" long pigtails, 4 AWG, are supplied on the collector. Customer supplied wiring connects to the collector pigtail with in-line connectors. **Used on 500A conductor bar only.**

TYPE	Cap. (amps)	Part No.	Wt lb (kg)
Standard Collector with Shoe	125	30388	3.50 (1.58)
Stainless Steel Collector with Shoe	125	50205	3.58 (1.76)
Lateral Mount Collector with Shoe	125	532272	3.36 (1.52)
Replacement Shoe	125	30516	1.00 (0.45)
Cast Iron Cleaning Shoe	n/a	39166	1.38 (0.63)

Tandem Collector - 250 Amp

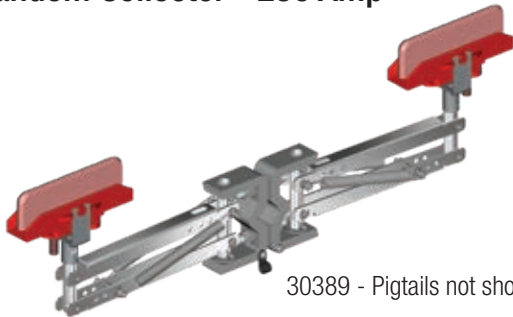


30389 - Pigtails not shown

21" long pigtails, 4 AWG, are supplied on the collector. Customer supplied wiring connects to the collector pigtail with in-line connectors. **Used on 500A conductor bar only.**

TYPE	Cap. (amps)	Part No.	Wt lb (kg)
Standard Collector with Shoes	250	30389	6.54 (2.96)
Stainless Steel Collector with Shoes	250	39752	6.76 (3.06)
Lateral Mount Collector with Shoes	250	532273	6.39 (2.90)
Replacement Shoe 2 required per collector	250	30516	1.0 (0.45)
Cast Iron Cleaning Shoe 2 required per collector	n/a	39166	1.38 (0.63)

Single Collector - 200 | 300 Amp




24060 - Pigtails not shown

42" long pigtails, 2 AWG, are supplied on the collector. Customer supplied wiring connects to the collector pigtail with in-line connectors. **Used on 700A - 1500A conductor bar only.** Note that the 300A version is the same as the 200A, except with an extra tension spring on the arm.

TYPE	Cap. (amps)	Part No.	Wt lb (kg)
Standard Collector with Shoe	200	24060	6.79 (3.08)
Stainless Steel Collector with Shoe	200	51522	6.87 (3.11)
Standard Collector with Shoe	300	24060Q	6.89 (3.12)
Lateral Mount Collector with Shoe	200	31933	4.80 (2.18)
Replacement Shoe	200	11417X	0.76 (0.34)
Cast Iron Cleaning Shoe	n/a	28267	1.0 (0.45)

Tandem Collector - 400 Amp

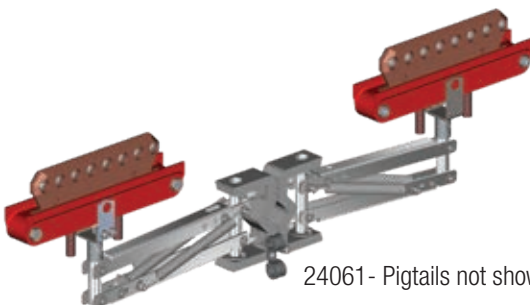

24061 - Pigtails not shown

42" long pigtails, 2 AWG, are supplied on the collector. Customer supplied wiring connects to the collector pigtail with in-line connectors. **Used on 700A - 1500A conductor bar only.** Note that the 600A version is the same as the 400A, except with one extra tension spring on each arm.

TYPE	Cap. (amps)	Part No.	Wt lb (kg)
Standard Collector with Shoes	400	24061	13.31 (6.04)
Stainless Steel Collector with Shoes	400	39848	13.25 (6.01)
600A Standard Collector with Shoes	600	24061B	13.31 (6.04)
Lateral Mount Collector with Shoes	400	32111D	21.36 (9.69)
Replacement Shoe (2 required/collector)	400	11417X	0.38 (0.17)
Cast Iron Cleaning Shoe (2 required /collector)	n/a	28267	1.0 (0.45)

Hevi-Bar II 500A - 700A Support Brackets

The Hevi-Bar II Support Brackets listed below are for 500A - 700A conductors. They are available in three types as listed below and can be ordered in five different configurations:

- Bracket only (no hangers included)
- Bracket with four pre-installed hangers - standard Polycarbonate
- Bracket with four pre-installed hangers - standard Polycarbonate w/insulators
- Bracket with four pre-installed hangers - stainless steel cross-bolt
- Bracket with four pre-installed hangers - stainless steel cross-bolt w/insulators

Authorized Sales & Service
J. HERBERT CORPORATION
 Call 1-800-255-0588
 407-846-0588 Fax: 846-1066
 info@jherbertcorp.com
 Visit us online:
 www.jherbertcorp.com


All holes to accept hangers are 3" on-center and .56" diameter.

Web Bracket


Mounts to vertical web of beam. Bracket is 2" wide by 3/8" thick.

* Brackets 33655 & 35337 are 1/2" thick

						Part Nos. - With Four Hangers Pre-Installed			
For Bar	Bracket Finish	Dim X inches (mm)	Dim Y Inches (mm)	Part No. Bracket Only	Wt lb (kg)	Standard Polycarbonate	Standard Polycarbonate w/Insulators	Stainless Steel Cross-Bolt	Stainless Steel Cross-Bolt w/Insulator
500A	Plated Steel	6.0 (152)	16.25 (413)	29441	4.4 (2.996)	29440	29440B	29440C	29440D
	Plated Steel	9.0 (229)	19.25 (489)	30503	5.1 (2.313)	51785	51785B	51785C	51785D
	Plated Steel	11.0 (279)	21.25 (540)	33655	7.3 (3.311)	38268	38268B	38268C	38268D
	Stainless Steel	9.0 (229)	19.25 (489)	35337	6.7 (3.309)	51786	51786B	51786C	51786D
	Hot Dip Galv.	9.0 (229)	19.25 (489)	30697	5.1 (2.313)	34814	34814B	34814C	34814D
700A	Plated Steel	6.0 (152)	16.25 (413)	29441	4.4 (2.996)	537794	537794B	537794C	537794D
	Plated Steel	9.0 (229)	19.25 (489)	30503	5.1 (2.313)	537796	537796B	537796C	537796D
	Plated Steel	11.0 (279)	21.25 (540)	33655	7.3 (3.311)	537795	537795B	537795C	537795D
	Stainless Steel	9.0 (229)	19.25 (489)	35337	6.7 (3.309)	n/a	n/a	n/a	n/a
	Hot Dip Galv	9.0 (229)	19.25 (489)	30697	5.1 (2.313)	537797	537797B	537797C	537797D

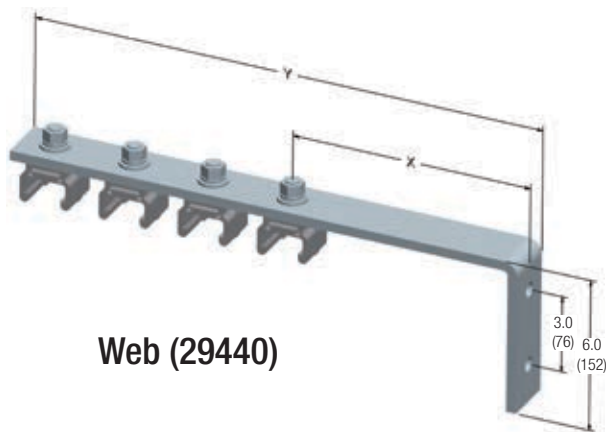

Web (29440)

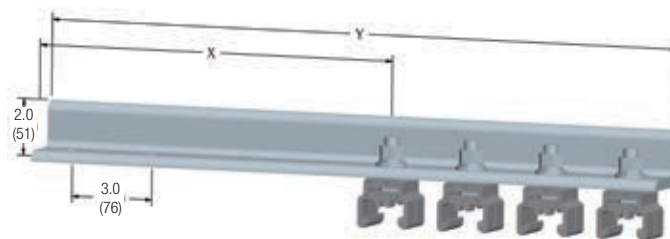

Flange (30493)

Flange Bracket

Mounts to top flange of beam. Bracket is a 2"x 2" angle, by 3/8" thick.

The first hole is 1 1/4" from the end.

						Part Nos. - With Four Hangers Pre-Installed			
For Bar	Bracket Finish	Dim X Inches (mm)	Dim Y Inches (mm)	Part No. Bracket Only	Wt lb (kg)	Standard Polycarbonate	Standard Polycarbonate w/Insulators	Stainless Steel Cross-Bolt	Stainless Steel Cross-Bolt w/Insulator
500A	Plated Steel	13.25 (337)	23.50 (597)	30529	8.8 (3.992)	30493	30493B	30493C	30493D
700A	Plated Steel	13.25 (337)	23.50 (597)	30529	8.8 (3.992)	51878	51878B	51878C	51878D

Hevi-Bar II 1000A - 1500A Support Brackets

The Hevi-Bar II Support Brackets listed below are for 1000A or 1500A conductors. They are available in three types as listed below, and can be ordered in five different configurations:


- Bracket only (no hangers included)
- Bracket with four pre-installed hangers - standard Polycarbonate
- Bracket with four pre-installed hangers - standard Polycarbonate w/insulators
- Bracket with four pre-installed hangers - stainless steel cross-bolt
- Bracket with four pre-installed hangers - stainless steel cross-bolt w/insulators

All holes to accept hangers are 3" on-center and .56" diameter.


Web Bracket

Mounts to vertical web of beam. Bracket is 2" wide by 1/2" thick.

Bracket Finish	Dim X Inches (mm)	Dim Y Inches (mm)	Part No. Bracket Only	Wt (lb)	Part No. - With Four Hangers Pre-Installed			
					Standard Polycarbonate	Standard Polycarbonate w/Insulators	Stainless Steel Cross-Bolt	Stainless Steel Cross-Bolt w/Insulator
Plated Steel	6.0 (152)	16.25 (413)	537552	5.6	32893	32893B	32893C	32893D
Plated Steel	9.0 (229)	19.25 (489)	537554	6.2	39923	39923B	39923C	39923D
Hot Dip Galv.	9.0 (229)	19.25 (489)	537555	6.2	32932	32932B	32932C	32932D

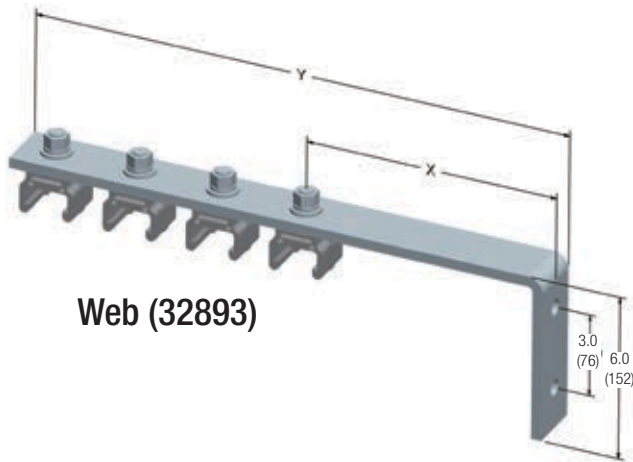

Web (32893)

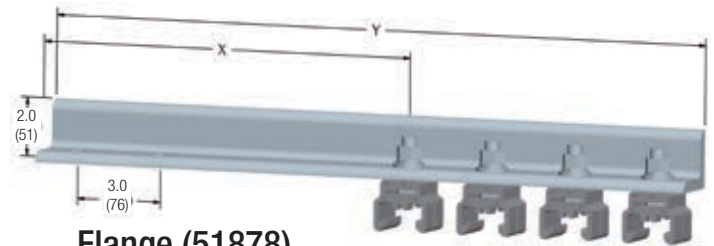

Flange (51878)


Flange Bracket

Mounts to top flange of beam. Bracket is a 2"x 2" angle, by 3/8" thick. The first hole is 1 1/4" from the end.

Bracket Finish	Dim X Inches (mm)	Dim Y Inches (mm)	Part No. Bracket Only	Wt (lb)	Part Nos. - With Four Hangers Pre-Installed			
					Standard Polycarbonate	Standard Polycarbonate w/Insulators	Stainless Steel Cross-Bolt	Stainless Steel Cross-Bolt w/Insulator
Plated Steel	13.25 (337)	23.50 (597)	30529	8.9	51878	51878B	51878C	51878D

Hevi-Bar II 700A - 1000A - 1500A Support Brackets

Braced Web Bracket Plated steel weldment with brace, used for heavier conductor bar (e.g. 1500A). Not for 500A bar.

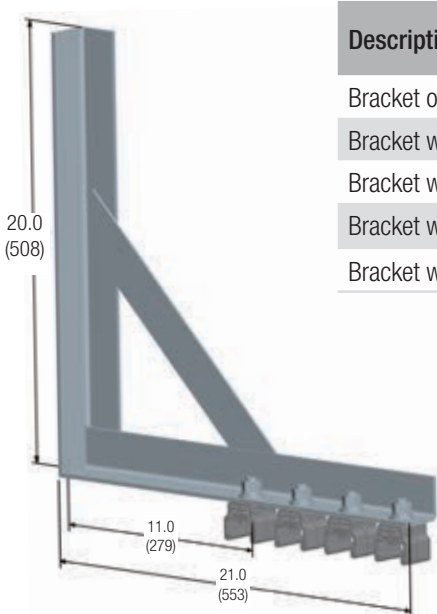


Braced Web (25691)

Description	Hanger Type	Part No.	Wt lb (kg)
Bracket only	n/a	25720	9.5 (4.30)
Bracket with 4 Hangers Installed	Polycarbonate (# 23223)	25691	4.4 (2.00)
Bracket with 4 Hangers Installed	Polycarbonate w/insulators (# 24902)	25691B	6.8 (3.08)
Bracket with 4 Hangers Installed	Stainless Steel Cross Bolt (# 27481)	25691C	5.7 (2.59)
Bracket with 4 Hangers Installed	Stainless Steel Cross Bolt w/Insulators (# 27482)	25691D	7.9 (3.58)

Lateral Bracket

Mounts to vertical web of beam to configure conductor bar one above the other. Bracket is 2" wide by 3/8" thick. Not for 500A bar.

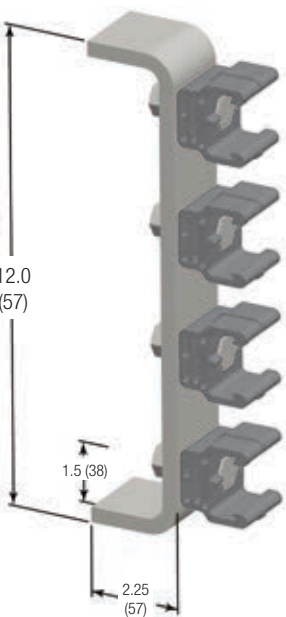

Lateral (51876)

Description	Hanger Type	Part No.	Wt lb (kg)
Bracket only	n/a	50498	3.1 (1.41)
Bracket with 4 Hangers Installed	Polycarbonate (# 23223)	51876	4.3 (1.95)
Bracket with 4 Hangers Installed	Polycarbonate w/insulators (# 24902)	51876B	6.7 (3.04)
Bracket with 4 Hangers Installed	Stainless Steel Cross Bolt (# 27481)	51876C	5.6 (2.54)
Bracket with 4 Hangers Installed	Stainless Steel Cross Bolt w/Insulators (# 27482)	51876D	7.8 (3.54)

Hevi-Bar II Specifications

Conductor Bar Cover

	Cover Type:				
	Standard (Ground)	UV Resistant	Medium Heat	Hi Heat*	Bare Bar
Material	PVC	PVC	Lexan Polycarbonate	Fiberglass Reinforced	N/A
Color	Orange (Green)	Black	Red	Orange	no color
Normal Ambient	-40°F to 104°F -40°C to 40°C	-40°F to 104°F -40°C to 40°C	-40°F to 200°F -40°C to 93.3°C	-40°F to 345°F -40°C to 173.8°C	-40°F to 690°F -40°C to 365.5°C
Max. Temperature	160°F (71.1°C)	160°F (71.1°C)	250°F (121.1°C)	400°F (204.4°C)	750°F (398.8°C)
Material	PVC	PVC	Lexan Polycarbonate	Fiberglass	N/A
Dielectric Strength	450 volts/mil	450 volts/mil	600 volts/mil	200 volts/mil	N/A
Volume Resistivity	>10 ¹² (Ω/mil)	>10 ¹² (Ω/mil)	>10 ¹³ (Ω/mil)	>10 ¹¹ (Ω/mil)	N/A
Flame Test	Self Extinguishing	Self Extinguishing	Self Extinguishing	Self Extinguishing	N/A
Specific Density	1.5 g/cm ³	1.5 g/cm ³	1.15 g/cm ³	1.24 g/cm ³	N/A

* 700A and 1000A only

Conductor Bar

	Nominal Current of Bar			
	500A	700A	1000A	1500A
Cross Sectional Area, in. (mm)	0.52 (333.5)	0.70 (451.6)	1.06 (680.6)	2.30 (1483.9)
AC & DC Voltage	600	600/4160	600/4160	600/4160
DC Resistance at 20°C (Ω/ft.)	3.27 x 10 ⁻⁵	2.11 x 10 ⁻⁵	1.41 x 10 ⁻⁵	0.64 x 10 ⁻⁵
Phase Corrected Impedance Z at 20°C (Ω/ft.)	5.40 x 10 ⁻⁵	4.21 x 10 ⁻⁵	3.39 x 10 ⁻⁵	2.28 x 10 ⁻⁵
Conductor Length, ft. (m)	30.0 (9.1)	30.0 (9.1)	30.0 (9.1)	30.0 (9.1)
Support Spacing, ft (m)	5 (1.52)	7.5 (2.28)	10 (3.05)	10 (3.05)
Spacing between Conductors, in (mm)	3.0 (76.2)	3.0 (76.2)	3.0 (76.2)	3.0 (76.2)
Expansion Sections not required for runs less than; ft. (m)	390 (11.9)	390 (11.9)	390 (11.9)	390 (11.9)
Minimum Bending Radius, ft (m)	8.0 (2.4)	10.0 (3.05)	12.0 (3.7)	15.0 (4.6)

Corrosion Protection

Hardware Type:	Duty
Zinc Plated	Moderate
Stainless Steel	Severe
DURA-COAT	Extreme Duty


Available Accessories (Contact Conductix-Wampfler)

- Thermostatically controlled heater wire system, for ice and snow environments (500A only)
- Transfer Caps for switches
- Pick-up Guides for discontinuous systems
- Vertical and horizontal curves


The appropriate conductor bar can be chosen only when all the relevant factors are known. Please refer to the Specification Data Sheet on Pg. 6, and to Appendices I through IV at the back of this catalog. Also, please consult Conductix-Wampfler Sales if you have any questions about the suitability of this product to your application.

Hevi-Bar II Installed Dimensions


500A - Standard Hanger

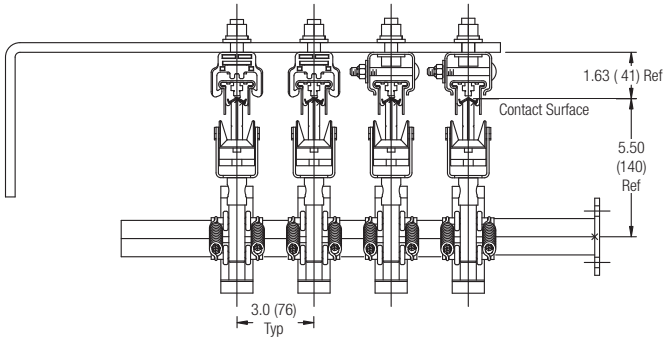


500A - with Insulators

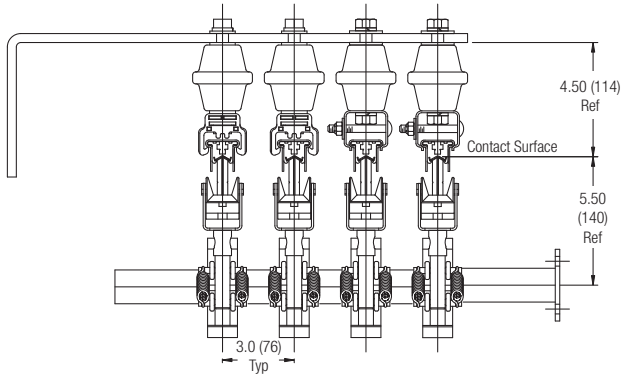


700A - Standard Hangers

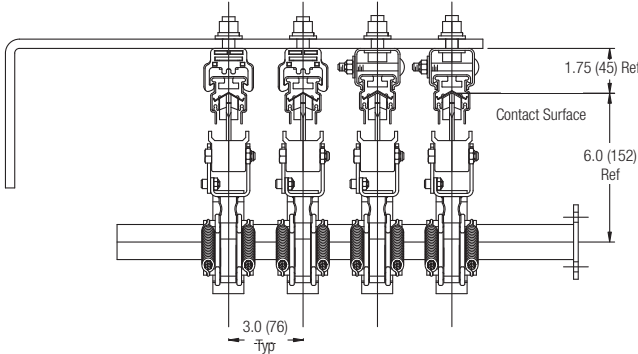


700A - with Insulators

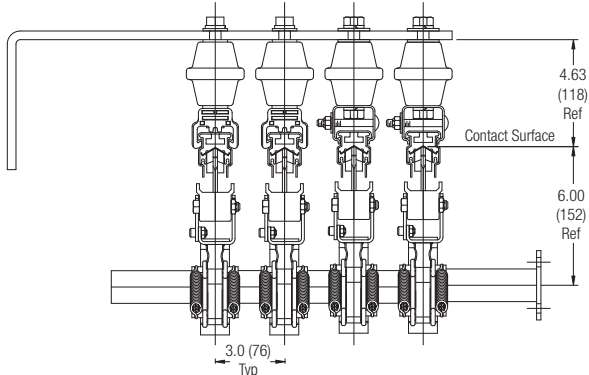


1000A - Standard Hangers

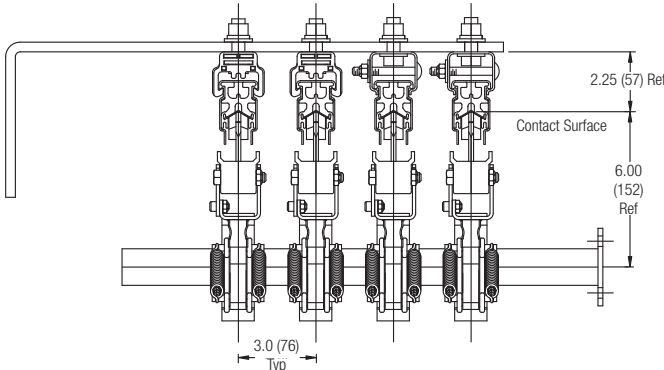


1000A - with Insulators

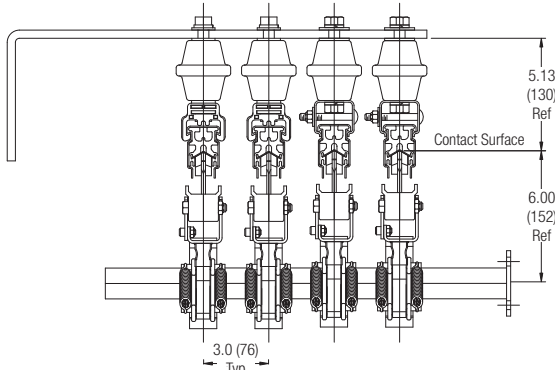

1500A - Standard Hangers

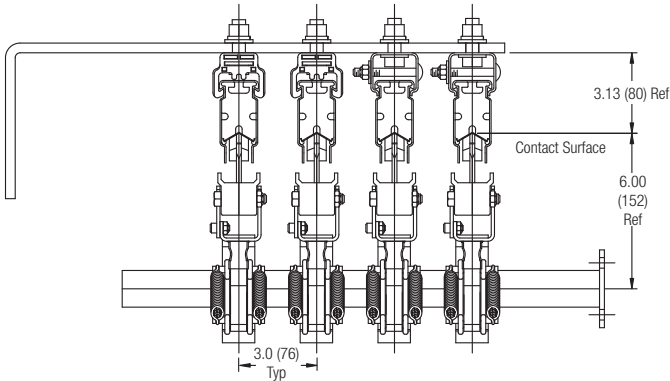


1500A - with Insulators

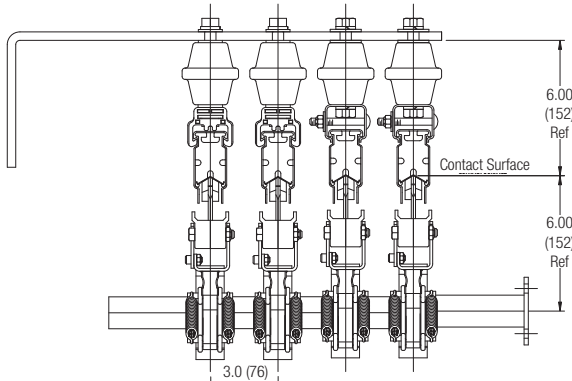


Hevi-Bar II Bar & Expansion Dimensions


Bar Profiles

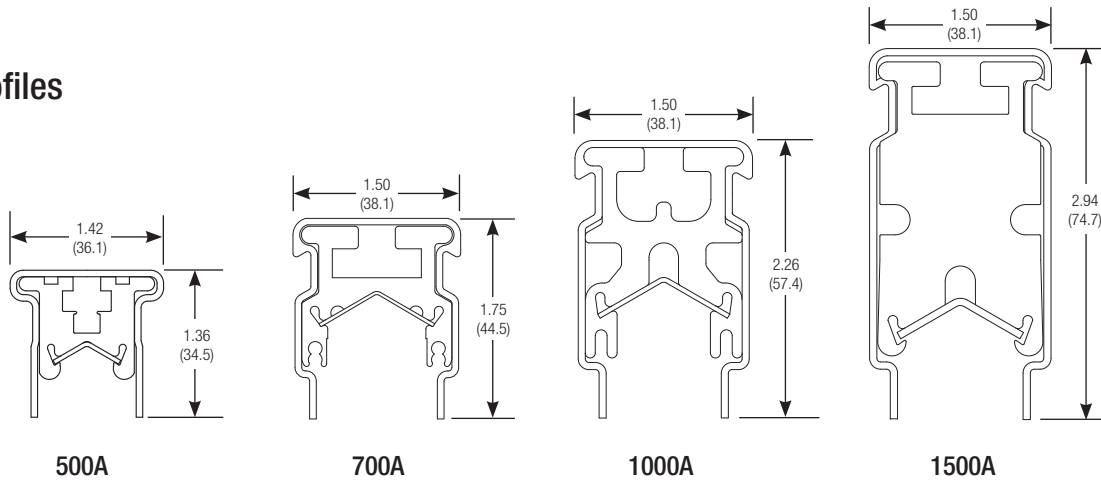


500A Expansion Section (37677 and 39741-J)

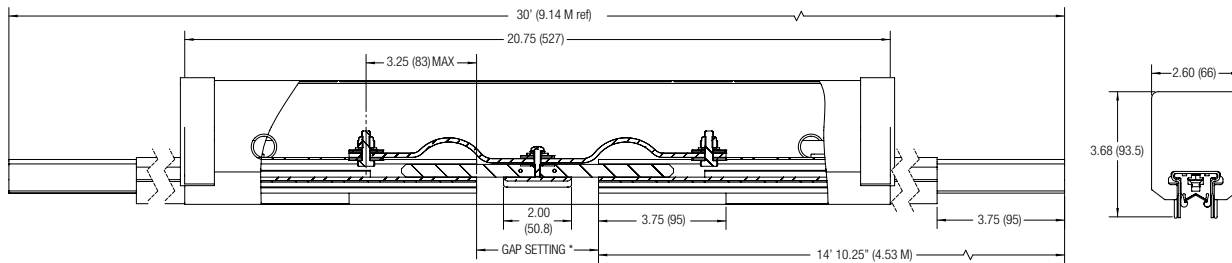


700A Expansion Section (24566 and 50739)

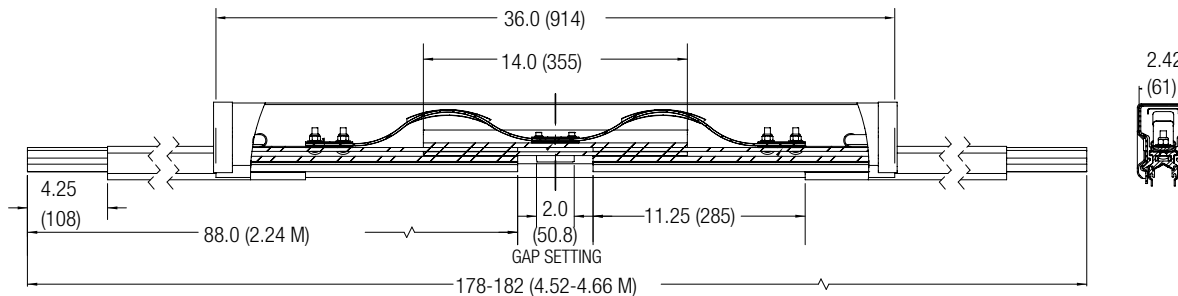

1000A Expansion Section (23512)

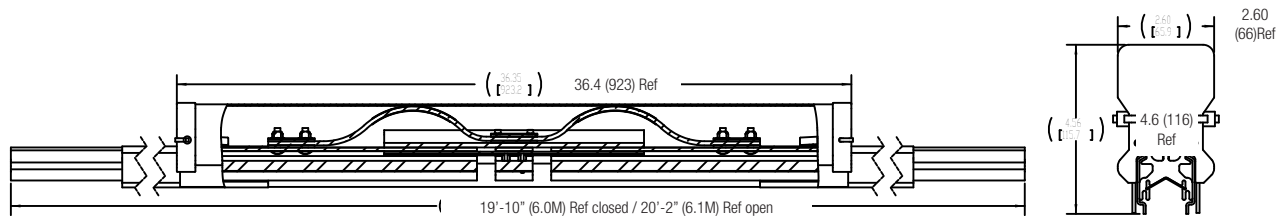


1500A Expansion Section (32820)

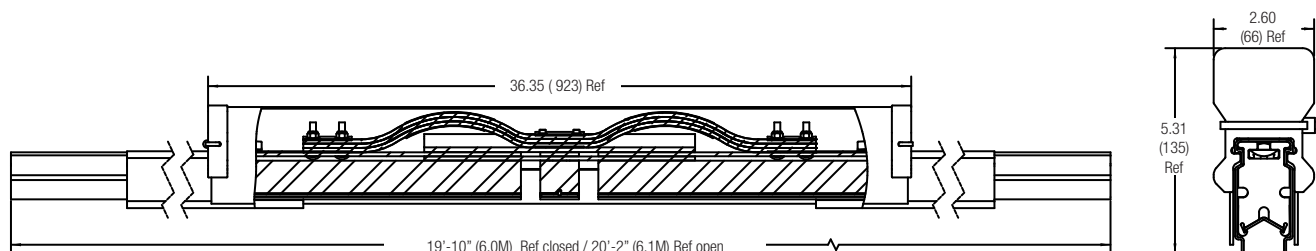


Hevi-Bar II Splice Dimensions


500A Splice (37676), 1/4" Bolts, Torque to 6 - 8 ft-lb

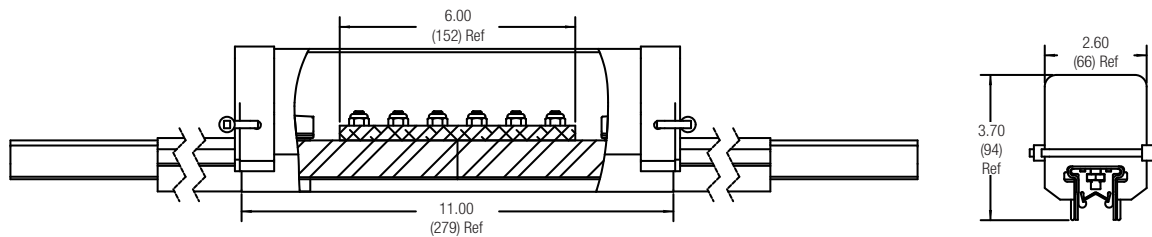


700A Splice (38115), 5/16" Bolts, Torque to 10 - 11 ft-lb

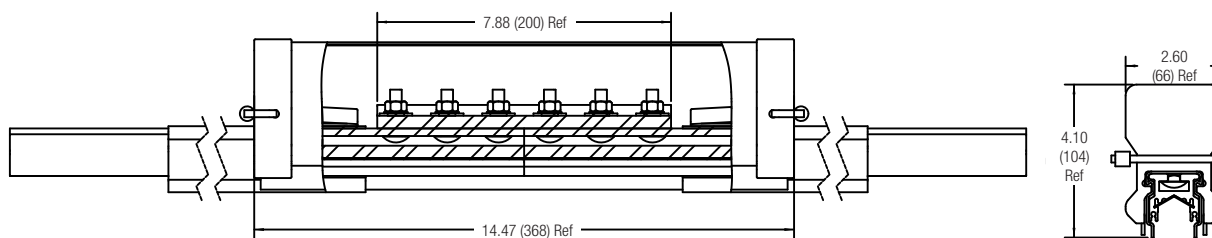

1000A Splice (37746), 5/16" Bolts, Torque to 10 - 11 ft-lb

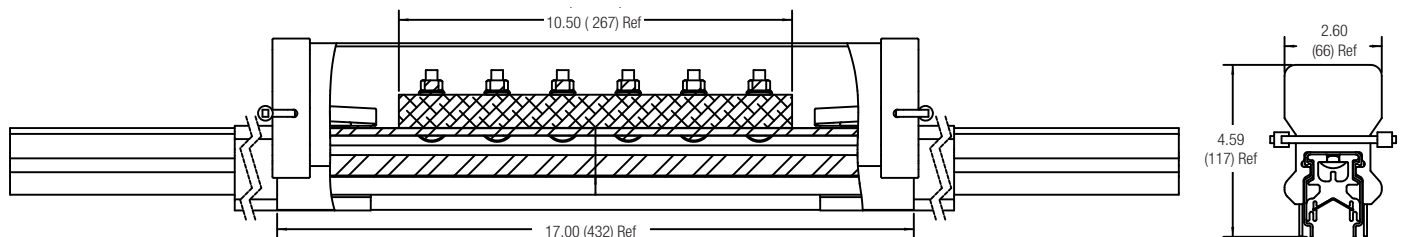


1500A Splice (38968), 5/16", Torque to 10 - 11 ft-lb

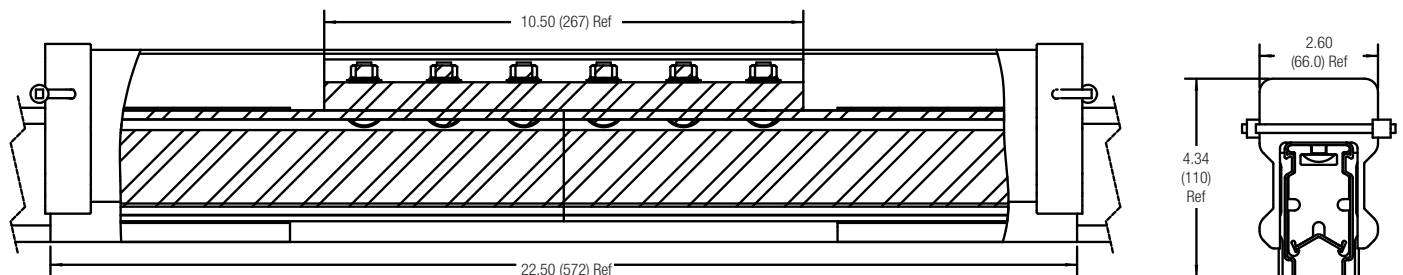


Hevi-Bar II Power Feed Dimensions


500A Power Feed (37674), 1/4" Bolts on 1" Centers, 6 - 8 ft-lb

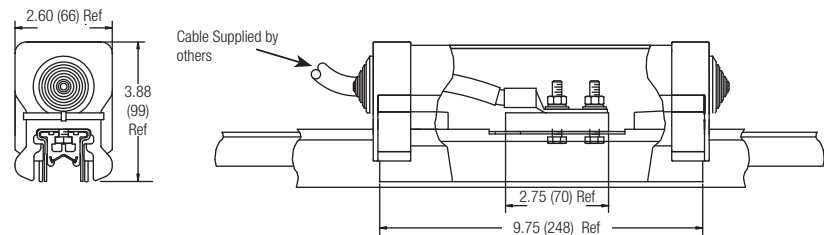


700A Power Feed (38117), 5/16" Bolts on 1" Centers, 10 - 11 ft-lb

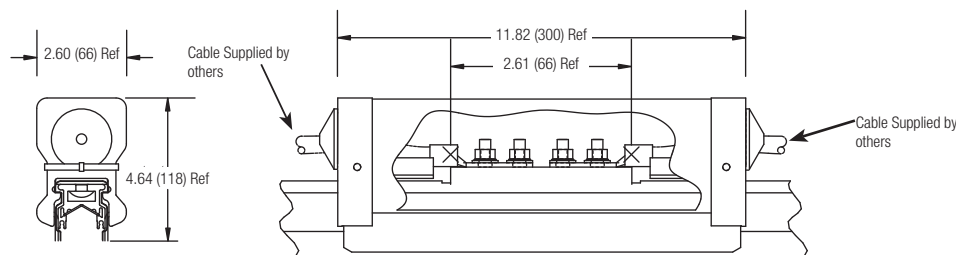

1000A Power Feed (38184), 5/16" Bolts on 1" Centers, 10 - 11 ft-lb


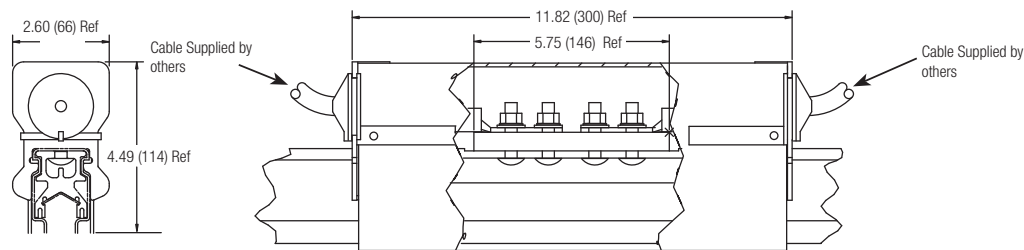


1500A Power Feed (50227), 5/16" Bolts on 1" Centers, 10 - 11 ft-lb


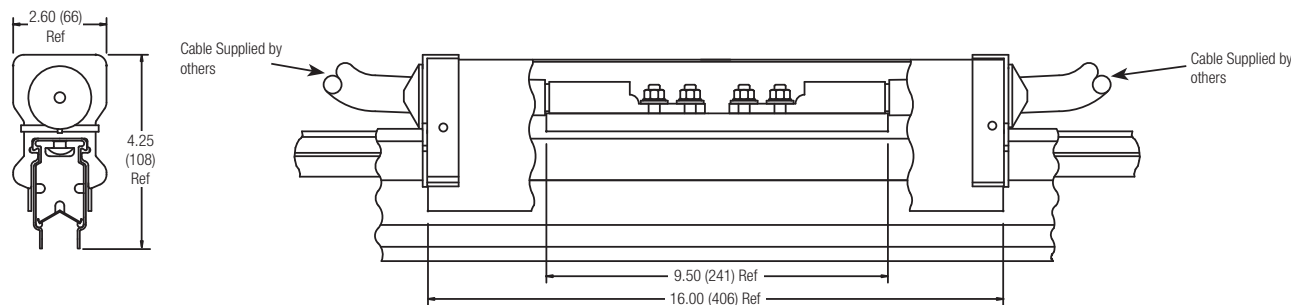


Hevi-Bar II Power Interrupting Section Dimensions



500A Power Interrupting Section (50746)

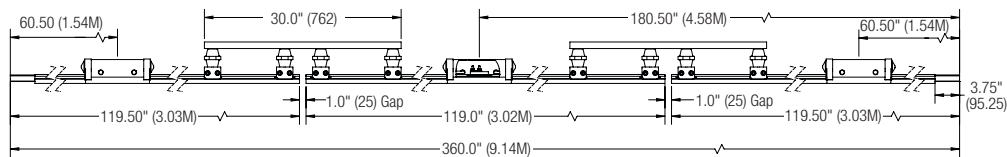



700A Power Interrupt (50748)

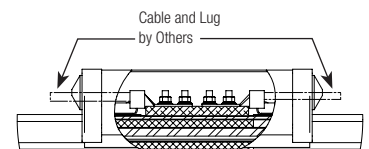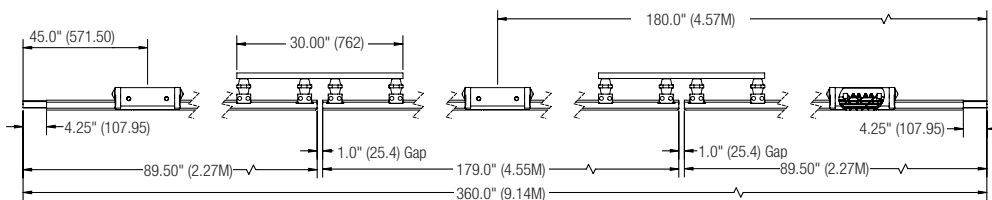

1000A Power Interrupt (50755)

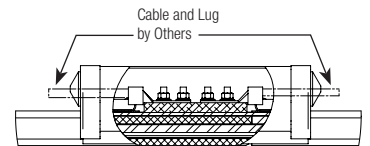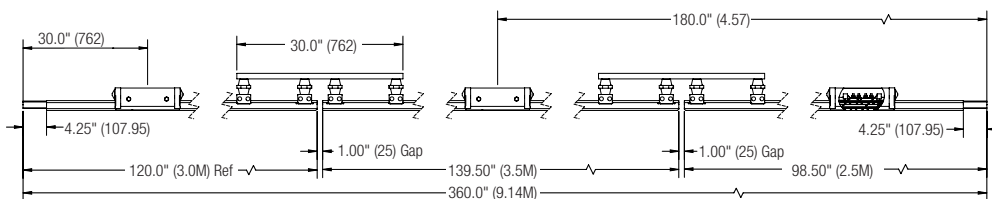


1500A Power Interrupt (50760)

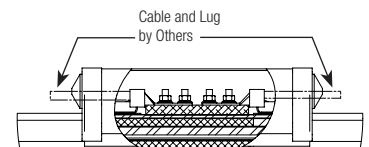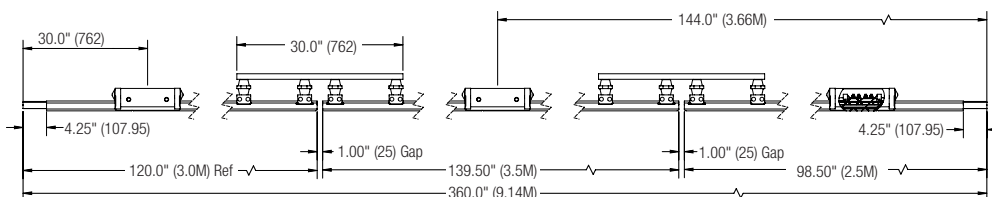


Hevi-Bar II End Cover Dimensions

Authorized Sales & Service
J. HERBERT CORPORATION
Call 1-800-255-0588
407-846-0588 Fax: 846-1066
info@jherbertcorp.com
Visit us online:
www.jherbertcorp.com


500A End Cover (27588)

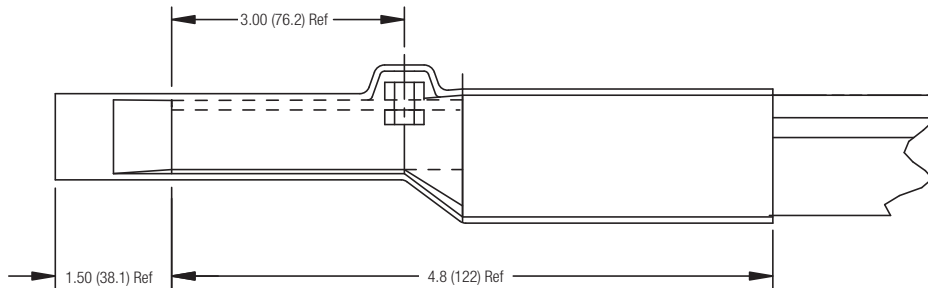


700A End Cover (50859)

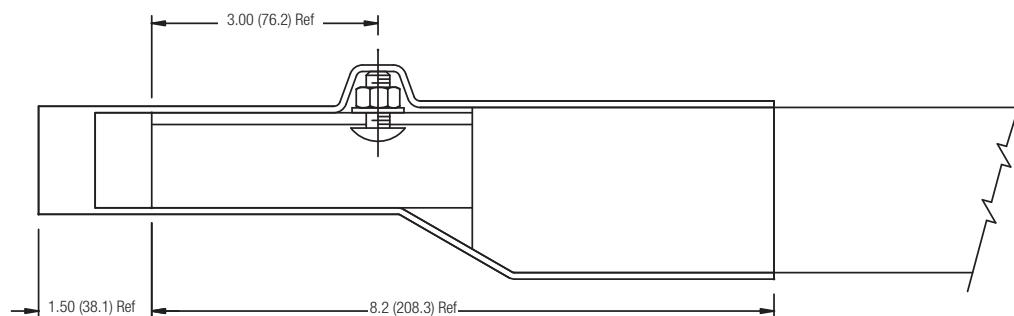

1000A End Cover (33796B)

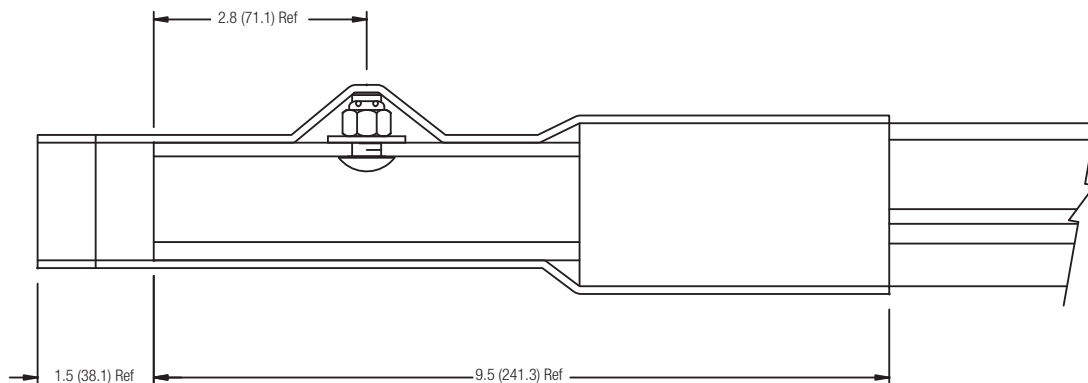


1500A End Cover (33796B)

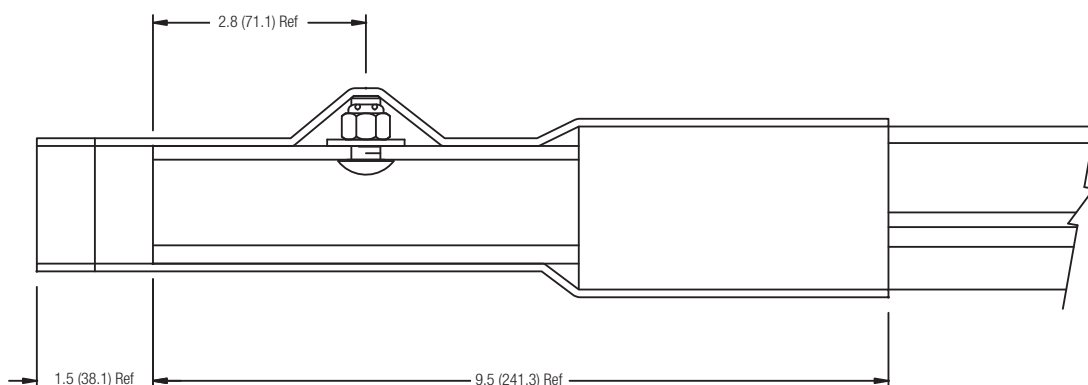


Hevi-Bar II Collector Dimensions

Authorized Sales & Service
J. HERBERT CORPORATION
Call 1-800-255-0588
407-846-0588 Fax: 846-1066
info@jherbertcorp.com
Visit us online:
www.jherbertcorp.com

125A Single Collector * (30388/50205)

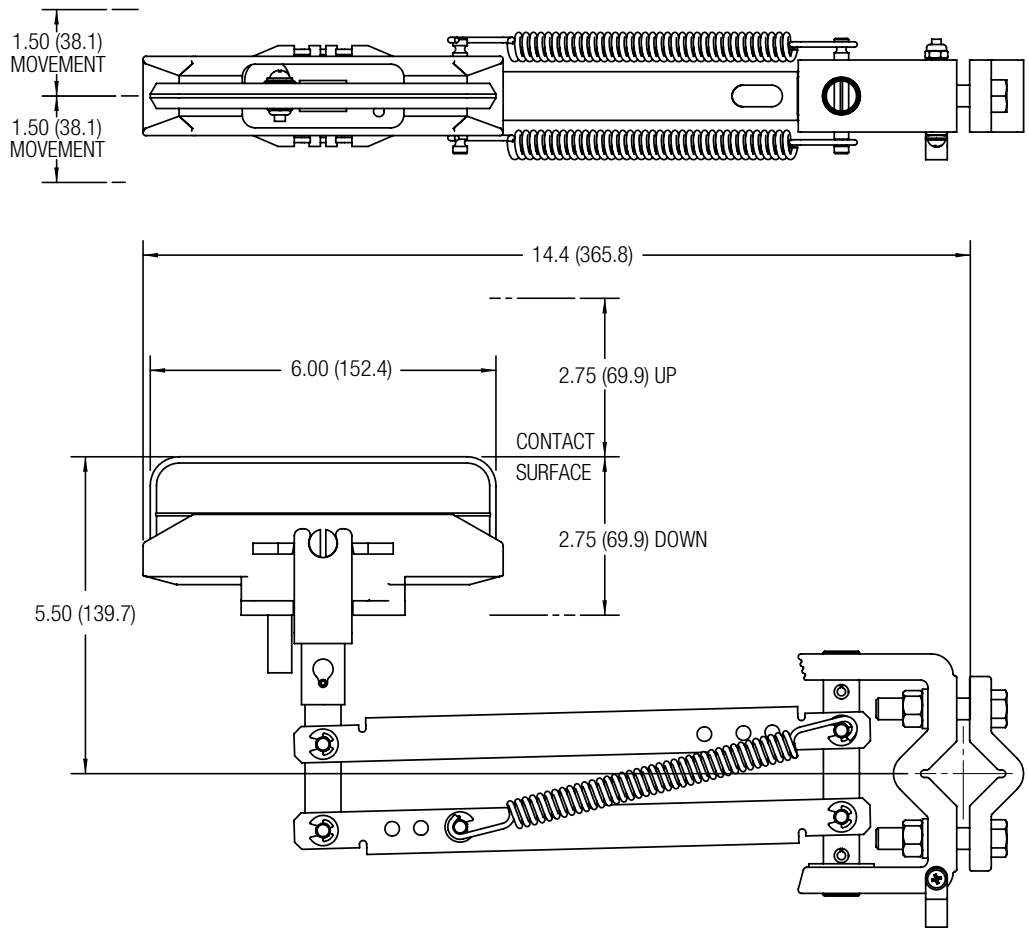


250A Tandem Collector * (30389/39752)

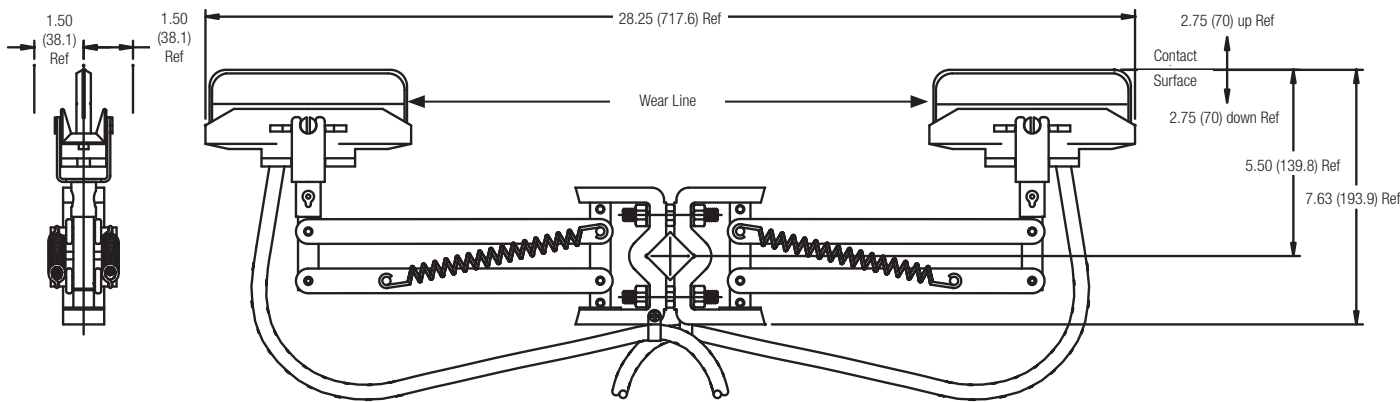


* Only for use with 500A Conductor Bar

Hevi-Bar II Collector Dimensions

200A & 300A Single Collector (24060 / 51522 / 24060Q)

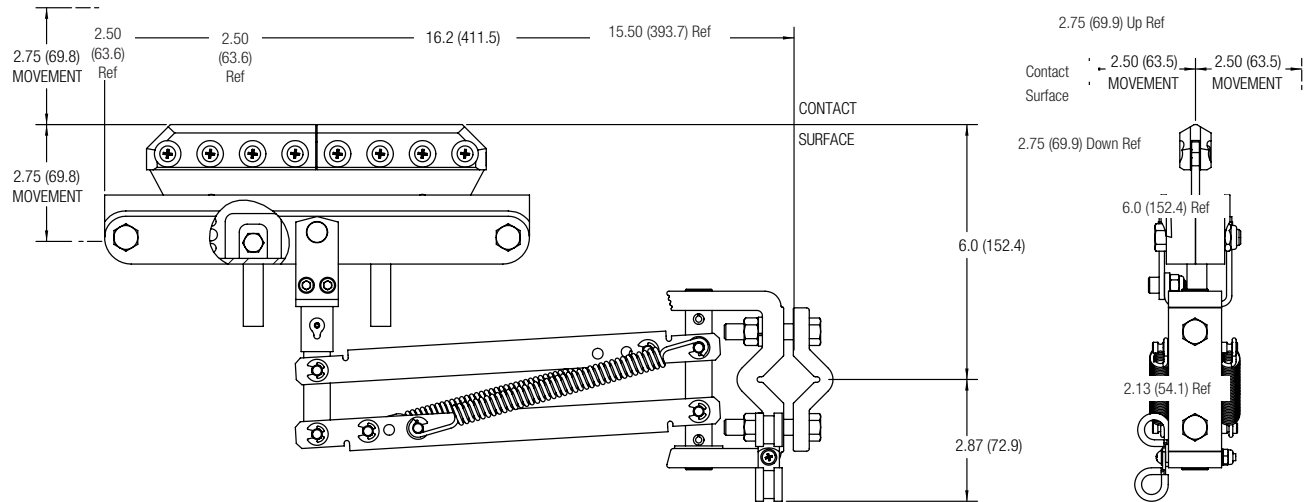

400A & 600A Tandem Collector (24061 / 39848 / 24061B)

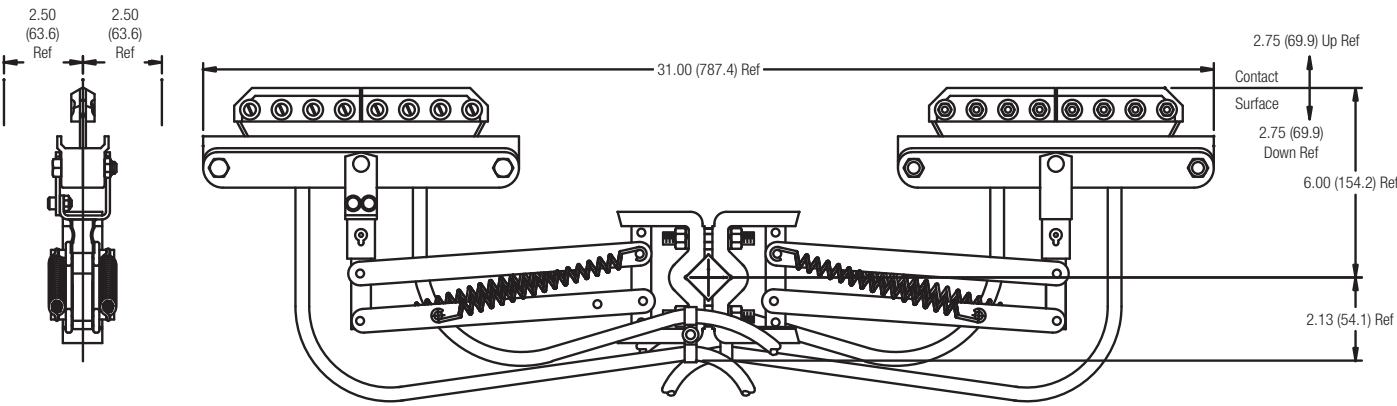

✱ Only for use with 700A, 1000A & 1500A Conductor Bar