

- **Swing fork lifters for all applications**
- **Designed for safety and ease of use**
- **Available in any required load capacity**


## **G1283 Swing Fork Lifters**

### **G1283 SWING FORK LIFTERS**

Mansaver<sup>®</sup> offers G1283 lifters in configurations to meet the specific requirements of your lifting applications.

Swing fork style grabs are most often used to handle long bundled loads, such as lumber or tubing, but are readily adapted to handling many types of loads. The design of these lifters make them particularly suitable for applications where close load spacing is required to conserve floor space.

All ACCO lifters conform to ASME B30.20 standards for below-the-hook lifters. Standard paint is ACCO safety yellow machine enamel.

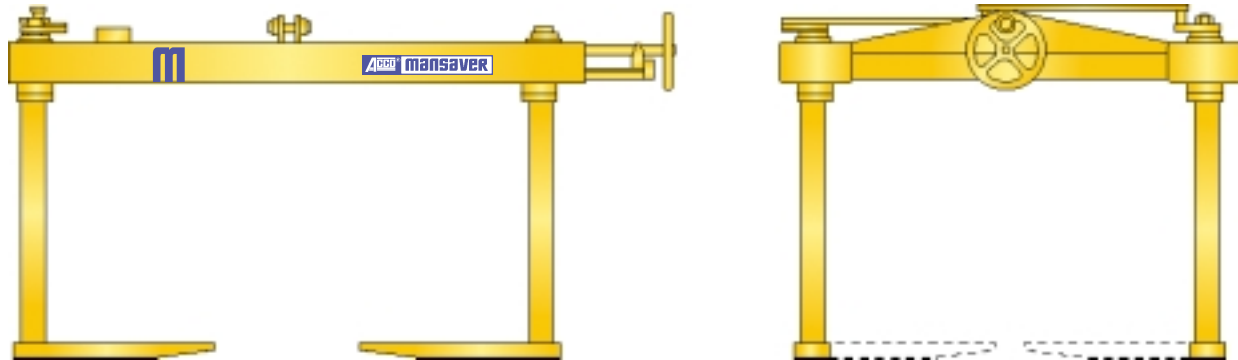


- **Handwheel operated four fork lifter**
- **Single removable pin style bail**

*Authorized Sales & Service*


**J. HERBERT CORPORATION**  
Call 1-800-255-0588  
407-846-0588 Fax: 846-1066  
info@jherbertcorp.com

Visit us online:  
[www.jherbertcorp.com](http://www.jherbertcorp.com)

# G1283 Swing Fork Lifters

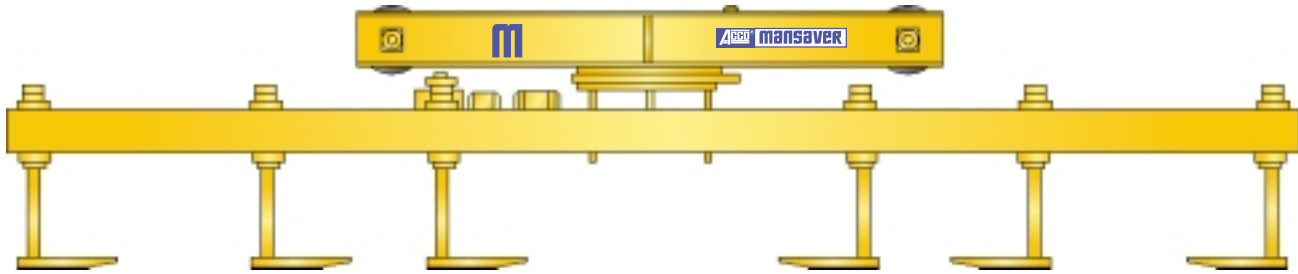

- Twelve fork bar lifter
- Powered rotation with twin sheave suspension

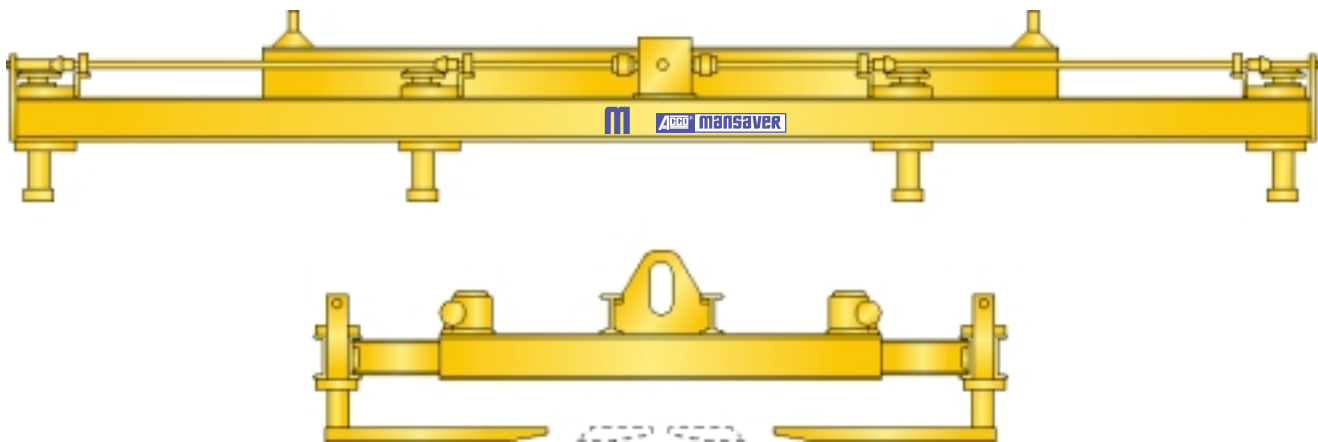

- Telescoping swing fork design
- Motorized telescoping legs and swing forks



# G1283 Swing Fork Lifters

## Selection Guide

All Mansaver® G1283 lifters are designed to perform specific lifting tasks in conjunction with other lifting equipment. The examples on the preceding page are intended to assist in deter-

mining what style lifter is best suited to your lifting application. Please supply available application information and submit to the ACCO Mansaver® sales department for pricing and

further assistance in equipment choice.

All ACCO MANSERVER® Products meet or exceed ANSI B.30.20\* for "Below The Hook" lifting devices.

All ACCO MANSERVER® Products have a one year warranty on workmanship and materials.\*\*

\* Please refer to ANSI Standards B.30.20 and B.30.9 for all lifting applications and guidelines.

\*\* Consult the factory for further details.

### LOAD INFORMATION:

Load description (bundles of lumber or other materials, containers, other): \_\_\_\_\_

Load size range: \_\_\_\_\_

Maximum load weight: \_\_\_\_\_

### LIFTER INFORMATION:

Required lifter capacity: \_\_\_\_\_

Capacity of the hoist the lifter will used with: \_\_\_\_\_

Lifter operation (manual or motorized): \_\_\_\_\_

Lifter suspension (single, double, sheaves, plate or pin style bail): \_\_\_\_\_

Options (manual or powered rotation, special paint, other): \_\_\_\_\_

Lifting Hoist Hook Information on reverse side

Clear Form

Authorized Sales & Service  
**J. HERBERT CORPORATION**  
Call 1-800-255-0588  
407-846-0588 Fax: 846-1066  
info@jherbertcorp.com  
Visit us online:  
www.jherbertcorp.com




**mansaver<sup>®</sup>**

*"The Lifting Power You Need."*

# G1283 Swing Fork Lifters

## Lifting Hoist Hook Information

*(Please Fill Out Completely)*

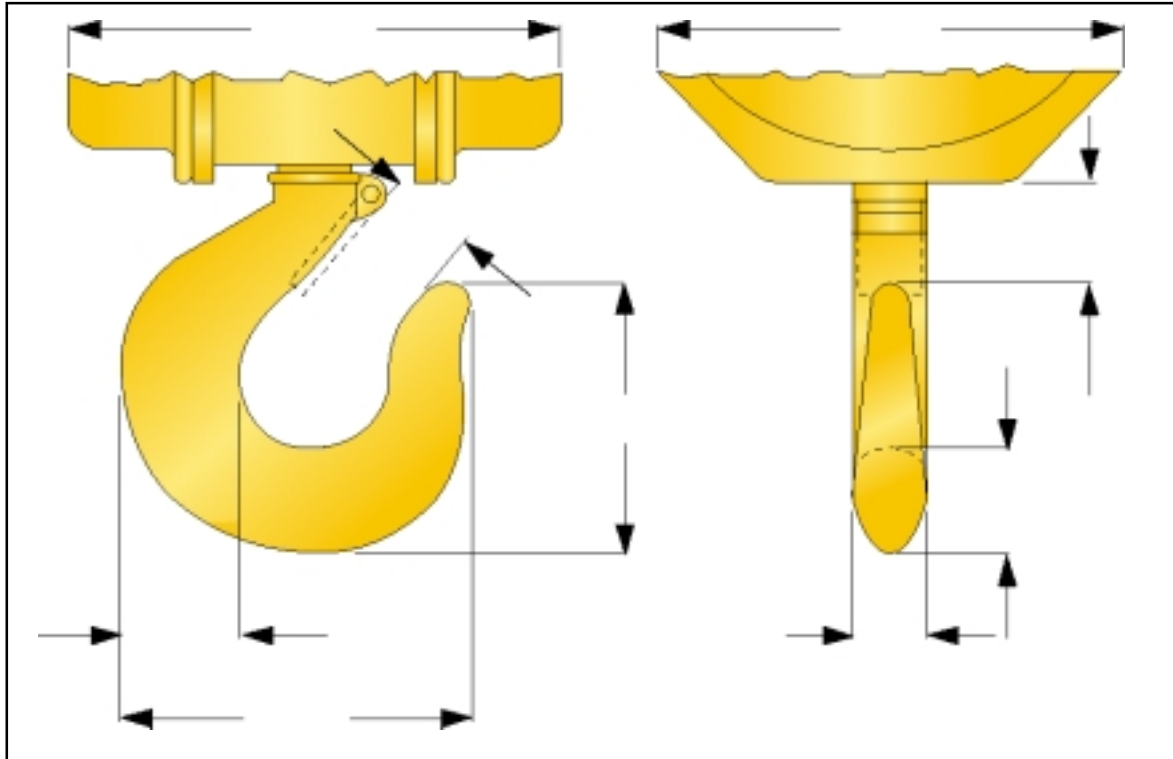

**Acco<sup>®</sup> Acco Chain & Lifting Products Division**

76 Acco Drive, Box 792, York, PA 17405  
Telephone 800-967-7333 Fax 800-715-8897  
www.accolifting.com

PART OF THE **FKI** GROUP OF COMPANIES

**Acco<sup>®</sup> 8.3.4**

*Authorized Sales & Service*

**J. HERBERT CORPORATION**

Call 1-800-255-0588  
407-846-0588 Fax: 846-1066  
info@jherbertcorp.com

Visit us online:  
www.jherbertcorp.com