

Clamps, Grabs & Tongs


Authorized Sales & Service
J. HERBERT CORPORATION
 Call 1-800-255-0588
 407-846-0588 Fax: 846-1066
 info@jherbertcorp.com
 Visit us online:
 www.jherbertcorp.com

Model 173 - Concrete Pressure Tong with Grip Teeth



PRODUCT FEATURES:

- Designed for handling cured concrete products.
- Automatically adjusts to the load size.
- Easy to release manual latch.
- Serrated steel cams securely grip the load.
- Pads can be rotated for longer field life.
- Complies with ASME standards

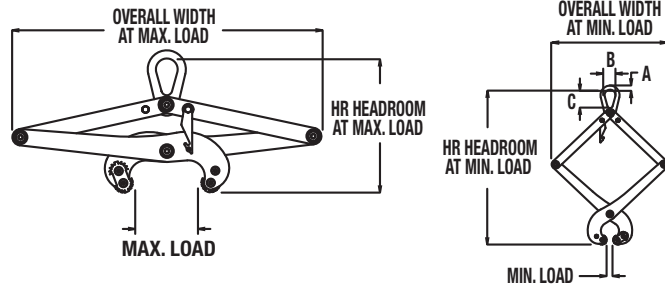

NOTE: Dimensions shown in inches.

SPECIFICATIONS

INSTOCK PROGRAM

Model No	Rated Cap. (lbs.)	Dimensions (inches)						Weight (lbs.)
		Load Width Min - Max	Overall width Min - Max	HR Headroom Min - Max	Bail			
173-1/4	550	1-3/16 - 6-5/16	21.8 - 28.8	13.5 - 29.5	11/16	1-11/16	2	24.5
173-1/2	1100	1-3/16 - 6-5/16	21.8 - 28.8	13.5 - 29.5	3/4	2	3-3/8	42.5
173-1	2200	2-3/8 - 7-3/32	32.6 - 36.6	16.7 - 29.5	11/16	1-11/16	2-3/8	93


NOTE: 1/4 ton unit has shackle lifting eye.

Model 176 - Concrete Pressure Tong with Urethane Pads



PRODUCT FEATURES:

- Designed for handling cured concrete products.
- Multiple adjusting ranges.
- Pivoting pads align with the load surface for proper contact.
- Adjustable lifting point to ensure a balanced lift.
- Complies with ASME standards

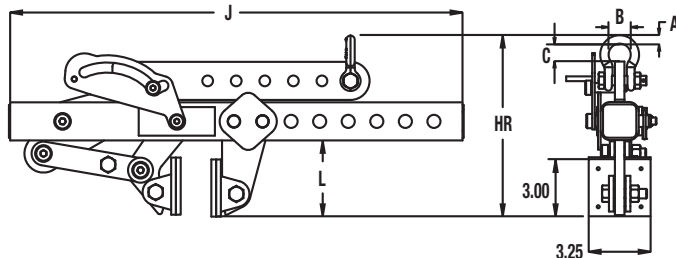

NOTE: Dimensions shown in inches.

SPECIFICATIONS

INSTOCK PROGRAM

Model No	Rated Cap. (lbs.)	Dimensions (inches)						Weight (lbs.)	
		Load Width Min - Max	Overall width J	L	HR Headroom Min - Max	Bail			
176-1/4	550	3/8 - 9-7/16	23.75	4-1/8	9 - 16.2	7/16	1-1/8	15/16	16
176-1/2	1100	3/8 - 9-7/16	23.75	4-1/8	9 - 16.2	7/16	1-1/8	15/16	21
176-1	2200	3/8 - 14-3/4	31	4-1/8	9-3/4 - 17	1/2	1-5/16	1-3/16	46