



Authorized Sales & Service

J. HERBERT CORPORATION

Call 1-800-255-0588

407-846-0588 Fax: 846-1066

info@jherbertcorp.com

Visit us online:

www.jherbertcorp.com

# J-906FCT SERIES

WALL BRACKET JIB CRANE

## CAPACITY UP TO 5 TONS

The Abell-Howe J-906FCT Series was developed to be an all purpose wall mount jib for heavy duty industrial applications.



## BENEFITS & FEATURES

### CAPACITIES

1/4 Ton to 5 Tons.

Boom Lengths up to 20 ft.

### SPECIFICATIONS

Up to 212 degree rotation for high hook lift applications

Conservatively designed mast resists torsional forces from off-center loading.

Fabricated steel hinge fittings with bearings.

Boom is preset to compensate for deflection under load.

End stops at both ends of the boom to limit trolley travel.

### OPTIONAL ACCESSORIES

Rotational stops

Available in Motorized versions (consult factory)

Wind or Position Lock

Galvanizing

Spark-resistant and/or explosion proof construction for hazardous locations

Messenger wire assembly

Electric, Air or Hand-gearred rotation.



## J-906FCT WALL BRACKET JIB CRANE

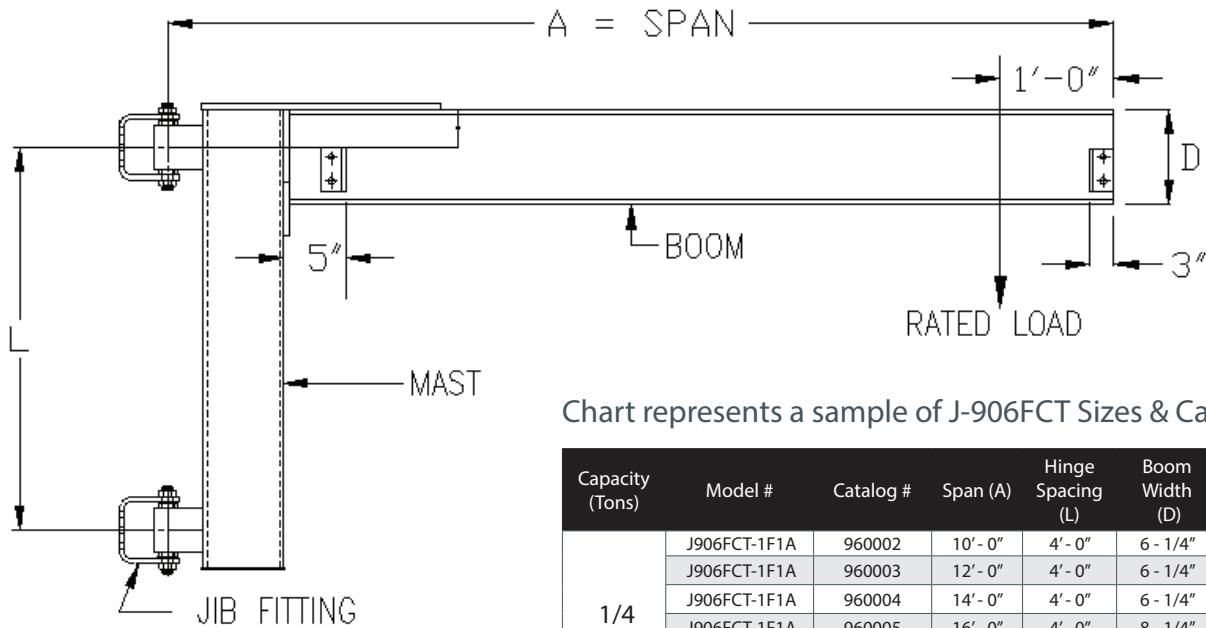


Chart represents a sample of J-906FCT Sizes & Capacities

Capacity (Tons)	Model #	Catalog #	Span (A)	Hinge Spacing (L)	Boom Width (D)	Rotation (Degrees)
1/4	J906FCT-1F1A	960002	10' - 0"	4' - 0"	6 - 1/4"	188°
	J906FCT-1F1A	960003	12' - 0"	4' - 0"	6 - 1/4"	188°
	J906FCT-1F1A	960004	14' - 0"	4' - 0"	6 - 1/4"	188°
	J906FCT-1F1A	960005	16' - 0"	4' - 0"	8 - 1/4"	188°
	J906FCT-1F1A	960006	18' - 0"	4' - 0"	8 - 1/4"	188°
1/2	J906FCT-1F1A	960007	20' - 0"	4' - 0"	10 - 3/8"	180°
	J906FCT-1F1A	960009	10' - 0"	4' - 0"	8 - 1/4"	188°
	J906FCT-1F1A	960010	12' - 0"	4' - 0"	8 - 1/4"	188°
	J906FCT-1F1A	960011	14' - 0"	4' - 0"	8 - 1/4"	188°
	J906FCT-1F1A	960012	16' - 0"	4' - 0"	10 - 3/8"	180°
	J906FCT-1F1A	960013	18' - 0"	4' - 0"	10 - 3/8"	180°
1	J906FCT-1F1A	960014	20' - 0"	6' - 0"	12 - 1/2"	180°
	J906FCT-1F1A	960016	10' - 0"	5' - 0"	10 - 3/8"	180°
	J906FCT-1F1A	960017	12' - 0"	5' - 0"	10 - 3/8"	180°
	J906FCT-1F1A	960018	14' - 0"	5' - 0"	10 - 3/8"	180°
	J906FCT-1F1A	960019	16' - 0"	6' - 0"	12 - 1/2"	180°
	J906FCT-1F1A	960020	18' - 0"	6' - 0"	16 - 1/8"	180°
1 - 1/2	J906FCT-1F1A	960021	20' - 0"	6' - 0"	16 - 1/8"	180°
	J906FCT-2F1A	960023	10' - 0"	4' - 0"	10 - 3/8"	212°
	J906FCT-2F1A	960024	12' - 0"	4' - 0"	12 - 1/2"	212°
	J906FCT-2F1A	960025	14' - 0"	4' - 0"	12 - 1/2"	212°
	J906FCT-2F1A	960026	16' - 0"	5' - 0"	16 - 1/8"	192°
	J906FCT-2F1A	960027	18' - 0"	6' - 0"	18 - 1/8"	192°
2	J906FCT-2F1A	960028	20' - 0"	6' - 0"	18 - 1/8"	192°
	J906FCT-2F1A	960030	10' - 0"	4' - 0"	12 - 1/2"	212°
	J906FCT-2F1A	960031	12' - 0"	4' - 0"	12 - 1/2"	212°
	J906FCT-2F1A	960032	14' - 0"	5' - 0"	16 - 1/8"	192°
	J906FCT-2F1A	960033	16' - 0"	6' - 0"	18 - 1/8"	192°
	J906FCT-2F1A	960034	18' - 0"	6' - 0"	18 - 1/8"	192°
3	J906FCT-2F1A	960035	20' - 0"	6' - 6"	21"	192°
	J906FCT-3F1A	960037	10' - 0"	4' - 0"	16 - 1/8"	180°
	J906FCT-3F1A	960038	12' - 0"	6' - 0"	16 - 1/8"	180°
	J906FCT-3F1A	960039	14' - 0"	6' - 0"	16 - 1/8"	180°
J906FCT-3F1A	960040	16' - 0"	6' - 6"	18 - 1/8"	180°	

Optional Models:

Part #	Description
J-904FMD	Foundation Mount - Electric Motor Drive
J-904FAMD	Foundation Mount - Air Motor Drive
J-904FHG	Foundation Mount - Hand Geared